



ViP2

VK2-1080VFD



Installation and user manual

WARNING

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE. DO NOT INSERT ANY METALLIC OBJECT THROUGH THE VENTILATION GRILLS OR OTHER OPENINGS ON THE EQUIPMENT.

CAUTION



EXPLANATION OF GRAPHICAL SYMBOLS



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of un-insulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

PRECAUTIONS

Safety ----- Installation -----

Should any liquid or solid object fall into the cabinet, unplug the unit and have it checked by the qualified personnel before operating it any further.

Do not install the unit in an extremely hot or humid place or in a place subject to excessive dust, mechanical vibration.

Unplug the unit from the wall outlet if it is not going to be used for several days or more. To disconnect the cord, pull it out by the plug. Never pull the cord itself.

The unit is not designed to be waterproof. Exposure to rain or water may damage the unit.

Allow adequate air circulation to prevent internal heat build-up. Do not place the unit on surfaces (rugs, blankets, etc.) or near materials (curtains, draperies) that may block the ventilation holes.

Cleaning -----

Clean the unit with a slightly damp soft cloth. Use a mild household detergent. Never use strong solvents such as thinner or benzene as they might damage the finish of the unit.

Height and vertical linearity controls located at the rear panel are for special adjustments by qualified personnel only.

Retain the original carton and packing materials for

safe transport of this unit in the future.

CAUTION: CHANGES OR MODIFICATIONS NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

CE COMPLIANCE STATEMENT

WARNING: This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
13. Unplug this apparatus during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been moisture, does not operate normally, or has been dropped.
15. **CAUTION – THESE SERVICING INSTRUCTIONS ARE FOR USE BY QUALIFIED SERVICE PERSONNEL ONLY. TO REDUCE THE RISK OF ELECTRIC SHOCK DO NOT PERFORM ANY SERVICING OTHER THAN THAT CONTAINED IN THE OPERATING INSTRUCTIONS UNLESS YOU QRE QUALIFIED TO DO SO.**
16. **Use satisfy clause 2.5 of IEC60950-1/UL60950-1 or Certified/Listed Class 2 power source only.**
17. ITE is to be connected only to PoE networks without routing to the outside plant.



Contents

1. Description	8
1.1 Components	8
1.2 Key Features	9
2. Installation	10
2.1 Over View	10
2.2 Base installation.....	11
2.3 Connection.....	12
2.4 Network Connection and IP assignment.....	13
3. Operation	14
3.1 Minimum conditions for using web browser.....	14
3.2 Accessing the IP camera	15
3.3 Access from the internet	16
3.4 Setting the admin password over a secure connection	16
3.5 Live View Page	17
3.6 Menu Configuration.....	19
3.6.1 Basic Configuration	20
3.6.2 Video & Image	25
3.6.3 Event.....	31
3.6.4 System.....	44
3.6.5 About	60
3.8 Playback for Micro SD card.....	61
3.9 Help	63
3.10 Resetting to the factory default settings	63
4. Appendix	64
4.1 Troubleshooting	64
4.2 Alarm Connection	65
4.3 Preventive Maintenance.....	65

1. Description

This manual applies to the VK2-1080VFD.


The VK2-1080VFD supports the network service for a sensor image with progressive scan, which can be monitored on a real-time screen regardless of distances and locations. By using its dedicated program, many users are able to have an access to the VK2-1080VFD at once or a single user can monitor various VK2-1080VFD s at the same time. It also enables users to play, store and retrieve a monitoring image by using a PC. All the settings and real-time monitoring screens are also provided through an access to the web.

The VK2-1080VFD is fully featured for security surveillance and remote monitoring needs. It is based on the DSP compression chip, and makes it available on the network as real-time, full frame rate Motion JPEG and H.264 (or MPEG-4) video streams.

The alarm input and alarm output can be used to connect various third party devices, such as, door sensors and alarm bells.

1.1 Components

The system comes with the following components:

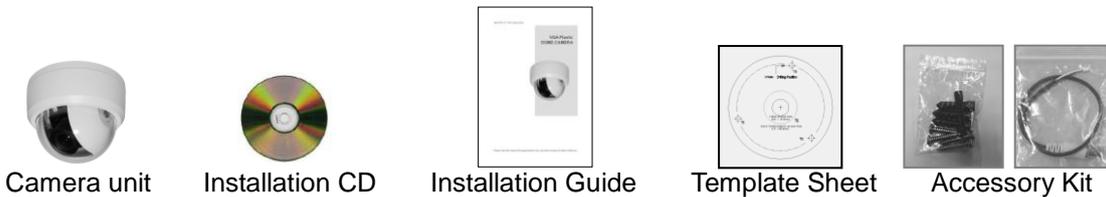

Note: Check your package to make sure that you received the complete system, including all components shown above.


1.2 Key Features

- **Brilliant video quality**
The VK2-1080VFD offers the highly efficient H.264 video compression, which drastically reduces bandwidth and storage requirements without compromising image quality. Motion JPEG is also supported for increased flexibility.
- **Dual streams**
The VK2-1080VFD can deliver dual video streams simultaneously at full frame rate in all resolutions up to Full HD (1920x1080) using Motion JPEG and H.264 (or MPEG-4). This means that 2 video streams can be configured with different compression formats, resolutions and frame rates for different needs.
- **Image setting adjustment**
The VK2-1080VFD also enables users to adjust image settings such as contrast, brightness and saturation to improve images before encoding takes place.
- **Intelligent video capabilities**
The VK2-1080VFD includes intelligent capabilities such as enhanced video motion detection. The encoder's external inputs and outputs can be connected to devices such as sensors and relays, enabling the system to react to alarms and activate lights or open/close doors.
- **Resolution**
The VK2-1080VFD supports up to 30fps@1920x1080
- **Micro-SD Recording support**
The VK2-1080VFD also supports a micro-SD memory slot for local recording with removable storage.
- **Improved Security**
The VK2-1080VFD logs all user access, and lists currently connected users. Also, its full frame rate video can be provided over HTTPS.
- **Power over Ethernet**
Support for Power over Ethernet (IEEE802.3af) enables the unit, as well as the camera module that is connected to it, to receive power through the same cable as for data transmission. This makes for easy installation since no power outlet is needed.
- **ONVIF**
This is a global interface standard that makes it easier for end users, integrators, consultants, and manufacturers to take advantage of the possibilities offered by network video technology. ONVIF enables interoperability between different vendor products, increased flexibility, reduced cost, and future-proof systems.

2. Installation

2.1 Over View

- **Front View**

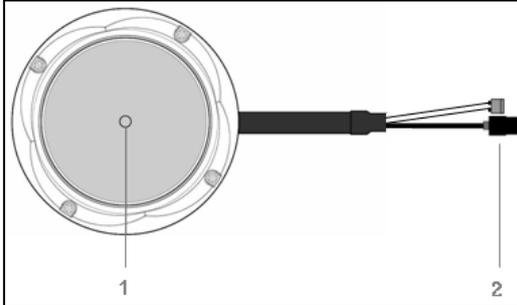


NO	Name	Description
1	Lens	3-9mm varifocal IR corrected lens
2	Connection Cable	IP and Power connection cable

- **Side View**




- **Bottom View**



NO	Name	Description
1	Micro SD Slot	Micro SD slot for local recording
2	Status LED	Amber : On while System Booting Green : Normal Operation
3	Alarm IO Terminal	AI: Alarm Input, G: Ground, AO: Alarm Output


- **Extension Cable**

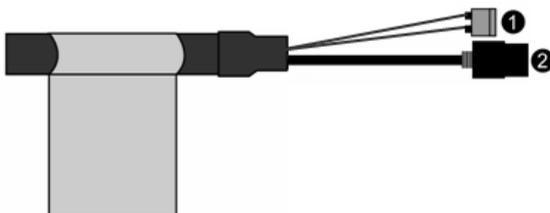


NO	Wire Colour	Description
1	Red: DC12V White: GND	Main Power, 2pin terminal, DC12V 330mA(4.0W)
2	Black	Ethernet, RJ-45 port compatible with 10/100Mbps PoE. Modular Jack

2.2 Base installation

Use the provided template to mark the required mounting and cable holes.

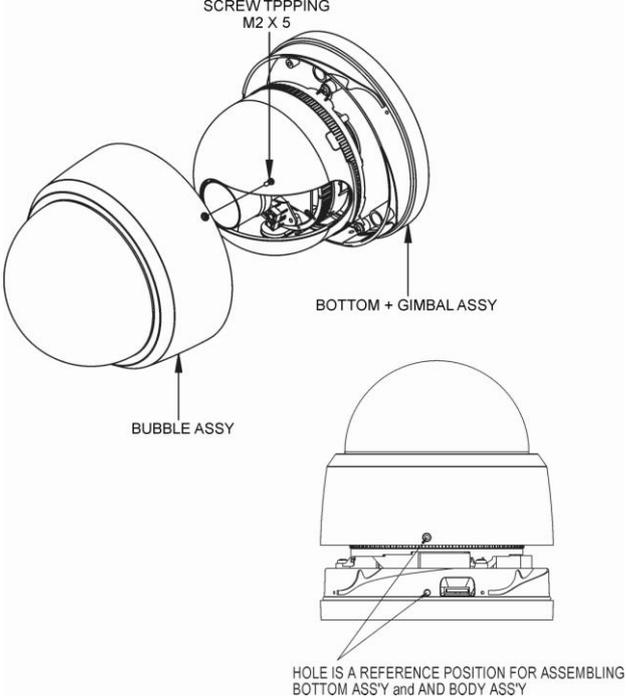

To remove dome cover, turn the dome cover counter clockwise until locators reach end of travel and pull off. Push the liner in the direction of the arrow (three 'OPEN' marks) and pull it off.

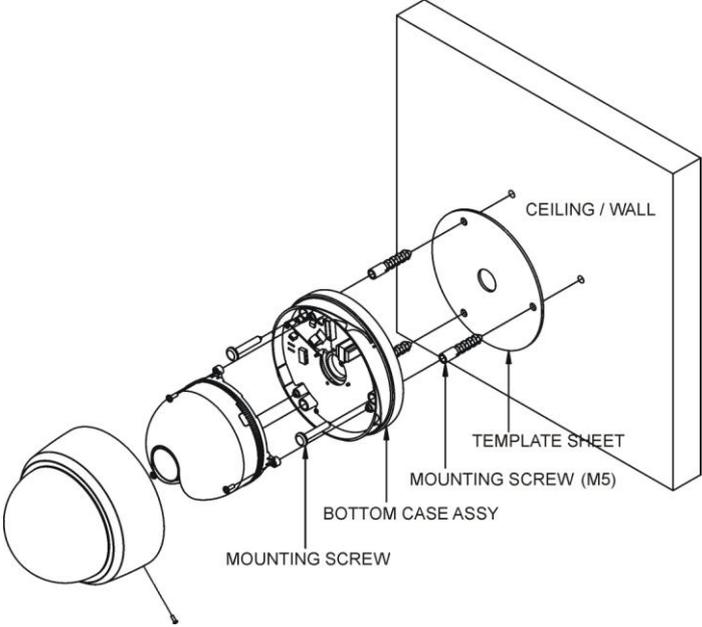

Fasten Mounting screws (2X) and align the dome camera as shown above. Turn the dome camera in a clockwise direction to lock it in position.

Secure the dome cover with the locking screw provided.

2.3 Connection

- **Connecting to the RJ-45**

Connect a standard RJ-45 cable to the network port of the VK2-1080VFD . Generally a cross-over cable is used for directly connection to PC, while a direct cable is used for connection to a switch or hub.

- **Connecting Alarms**

AI(Alarm In) :

You can use external devices to signal the VK2-1080VFD to react on events. Mechanical or electrical switches can be wired to the AI (Alarm In) and G (Ground) connectors in the bottom.


G(Ground) :

Connect the ground side of the alarm input and/or alarm output to the G (Ground) connector.

Alarm Out :

The VK2-1080VFD can activate external devices such as buzzers or lights. Connect the device to the AO (Alarm Out) and G (Ground) connectors.

- **Connecting Video Output for set up only**

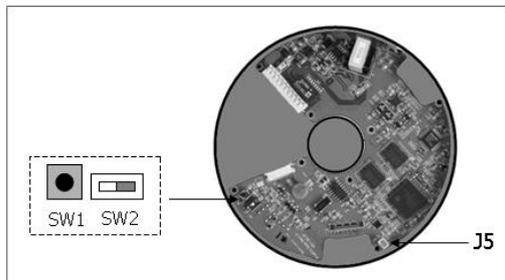

Video Output is used for an easy zoom and focus control when commissioning the camera. Set Video Switch (SW2 on the board) to On position to output the video signal. Video Output is restricted to VGA(640x480) resolution. Connect your Video cable unit to J5 on the board, as shown on the adjacent illustration.

Caution: After the camera has been focused, you must set Video Switch SW2 to the OFF position to provide the best performance of the VK2-1080VFD .


- **Connecting the Power (If not using PoE)**

Connect the power of 12VDC 330mA for the camera. Connect the positive (+) pole to the '+' position and the negative (-) pole to the '-' position.


2.4 Network Connection and IP assignment

When a VK2-1080VFD is first connected to the network it has a default IP address of 192.168.30.220. So, it will probably be necessary to allocate an IP address to the device with the “Smart Manager” utility on the CD.

1. Connect the VK2-1080VFD / device to the network and power up.
2. Start SmartManager utility, available on the supplied CD, the main window will be displayed, after a short while any network devices connected to the network will be displayed in the list.

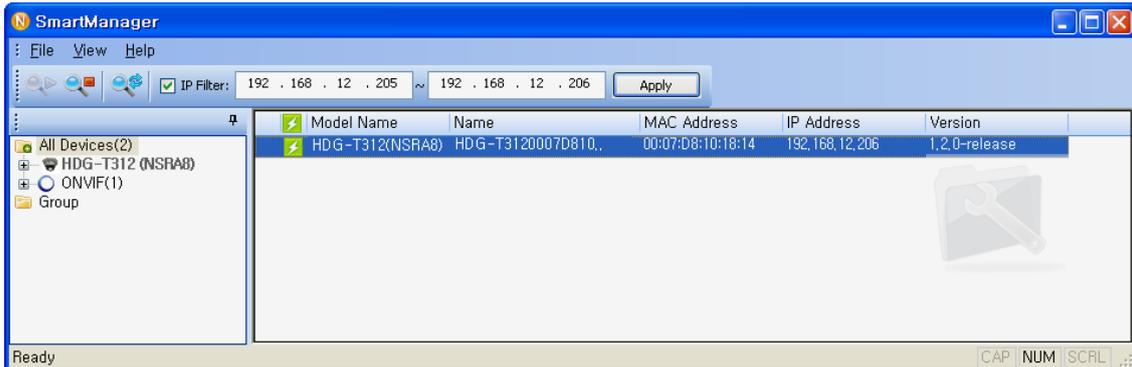

3. Select the camera on the list and right click the mouse. You will see the pop-up menu as below.

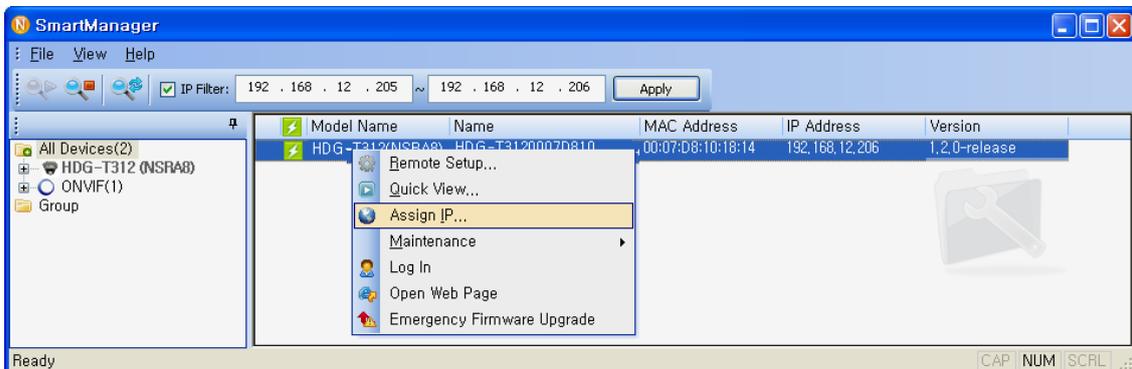

4. Enter the appropriate IP address.



Note: For more information, refer to the Smart Manger User’s Manual.

3. Operation

Before powering the camera, installation must be complete. The camera completes a configuration sequence taking approximately 40 seconds from powering up. Once completed the LED will be a constant Green.

The VK2-1080VFD can be used with Windows operating system and browsers. The recommended browsers are Internet Explorer, Safari, Firefox, Opera and Google Chrome.

NOTES

- To view streaming video in Microsoft Internet Explorer, set your browser to allow ActiveX controls.
- If the DHCP is enabled but the camera is not connected to a DHCP server, the camera will be set to a default IP address of 192.168.30.220 and will try to obtain an IP address from a DHCP server every two seconds.
- Network and processor bandwidth limitations might cause the video stream to pause or appear pixelated when an increased number of Web-interface users connect to the camera. Decrease the images per second, resolution, compression, or bit rate settings of the Web-interface video streams to compensate for network or processor limitations.

3.1 Minimum conditions for using web browser

The minimum system requirements to use a Web browser with this IP camera are as follows:

- CPU: Pentium® 4 microprocessor, 2.0GHz
- Operational System: Windows XP® or Windows Vista® or Windows7®
- System Memory: RAM 512 Mbyte
- Ethernet: 100 Mbit
- Video Resolution: 1024(Horizontal) x 768(Vertical) pixels or higher
- Internet Explorer® 7 or later
- ActiveX® 1.0.0.13 or later

3.2 Accessing the IP camera

1. Open Web browser
2. Type IP address: - The default IP address is **192.168.30.220**

NOTE

- If you do not know the camera's IP address, install the SmartManager® utility software available on the CD supplied with the product. The utility software will locate the assigned Model name, Host name, MAC address, IP address, Version and others.
- Refer to the SmartManager® utility software manual for more detail.


3. Log On to the camera

Default User = admin, default password = admin

- Click the Live View icon for default live image view or the Setup icon to change the configuration values.



4. The encoder's **Live View** page appears in your browser.

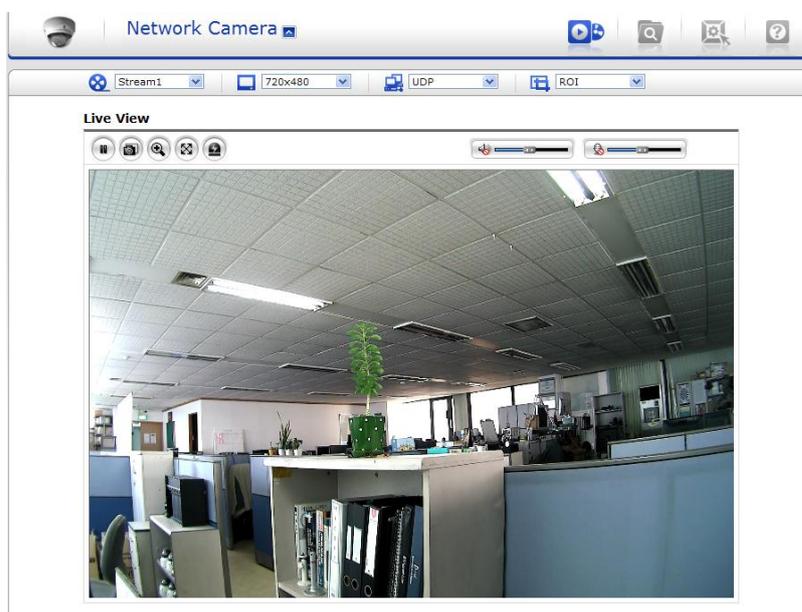

3.3 Access from the internet

The VK2-1080VFD is accessible on your local network (LAN). To access the camera from the Internet you must configure your broadband router to allow incoming data traffic to the camera. To do this, enable the NAT-traversal feature, which will attempt to automatically configure the router to allow access to the camera. This is enabled from Setup > System > Network > NAT.

For more information, please see “System>Network>NAT” of User’s Manual.

3.4 Setting the admin password over a secure connection

To gain access to the product, the password for the default administrator user must be set. This is done in the “Admin Password” dialog, which is displayed when the VK2-1080VFD is accessed for the setup at the first time. Enter your admin name and password, set by the administrator.

Note: The default administrator username and password is “admin”. If the password is lost, the VK2-1080VFD must be reset to the factory default settings. See “Resetting to the Factory Default Settings” for more details.




To prevent network eavesdropping when setting the admin password, this can be done via an encrypted HTTPS connection, which requires an HTTPS certificate (see note below).

To set the password via a standard HTTP connection, enter it directly in the first dialog shown below. To set the password via an encrypted HTTPS connection, see “System > Security > HTTPS”.

Note: HTTPS (Hypertext Transfer Protocol over SSL) is a protocol used to encrypt the traffic between web browsers and servers. The HTTPS certificate controls the encrypted exchange of information.

3.5 Live View Page

The live view page comes in eight screen modes like 1920x1080, 1280x1024, 1280x720, 704x480(576), 640x480, 352x240(288), and 320x240. Users are allowed to select the most suitable one out of those modes. Please, adjust the mode in accordance with your PC specifications and monitoring purposes.

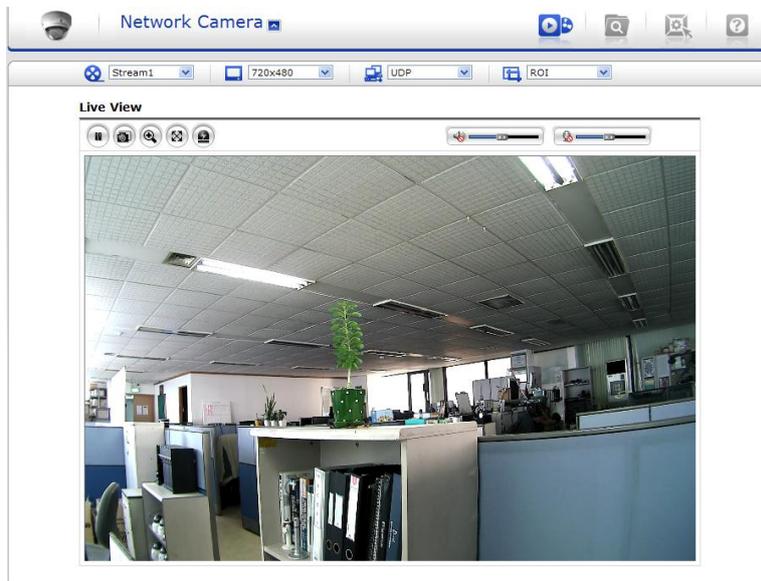


1) General controls

 Live View Page  Search & Playback Page  Setup Page  Help Page

 The video drop-down list allows you to select a customized or pre-programmed video stream on the live view page. Stream profiles are configured under Setup > Basic Configuration > Video & Image. For more information, please see “Basic Configuration > Video & Image” of User’s Manual.

 The resolution drop-down list allows you to select the most suitable one out of video resolutions to be displayed on live view page.

 The protocol drop-down list allows you to select which combination of protocols and methods to use depends on your viewing requirements, and on the properties of your network.

2) Control toolbar

The live viewer toolbar is available in the web browser page only. It displays the following buttons:

-  The Stop button stops the video stream being played. Pressing the key again toggles the start and stop. The Start button connects to the VK2-1080VFD or start playing a video stream.
-  The Pause button pause the video stream being played.
-  The Snapshot button takes a snapshot of the current image. The location where the image is saved can be specified.
-  The digital zoom activates a zoom-in or zoom-out function for video image on the live screen.
-  The Full Screen button causes the video image to fill the entire screen area. No other windows will be visible. Press the 'Esc' button on the computer keyboard to cancel full screen view.
-  The Manual Trigger button activates a pop-up window to manually start or stop the event.
-  Use this scale to control the volume of the speakers.
-  Use this scale to control the volume of the microphone.
-  Use this scale to control the volume of the speakers and microphones.

3) Video Streams

The VK2-1080VFD provides several images and video stream formats. Your requirements and the properties of your network will determine the type you use.

The Live View page in the VK2-1080VFD provides access to H.264, MPEG-4 and Motion JPEG video streams, and to the list of available video streams. Other applications and clients can also access these video streams/images directly, without going via the Live View page.

3.6 Menu Configuration

This section describes how to configure the VK2-1080VFD, and is intended for product Administrators, who have un-restricted access to all the Setup tools; and Operators, who have access to the settings for Basic, Live View, Video & Image, Audio, Event, and System Configuration.

You can configure the VK2-1080VFD by clicking Setup in the top right-hand corner of the Live View page. Click on this page to access the online help that explains the setup tools




When accessing the VK2-1080VFD for the first time, the “Admin Password” dialog appears. Enter your admin name and password, set by the administrator.

Note: If the password is lost, the VK2-1080VFD must be reset to the factory default settings. See “Resetting to the Factory Default Settings”

3.6.1 Basic Configuration

1) Users

User access control is enabled by default. An administrator can set up other users, by giving these user names and passwords. It is also possible to allow anonymous viewer login, which means that anybody may access the Live View page, as described below:

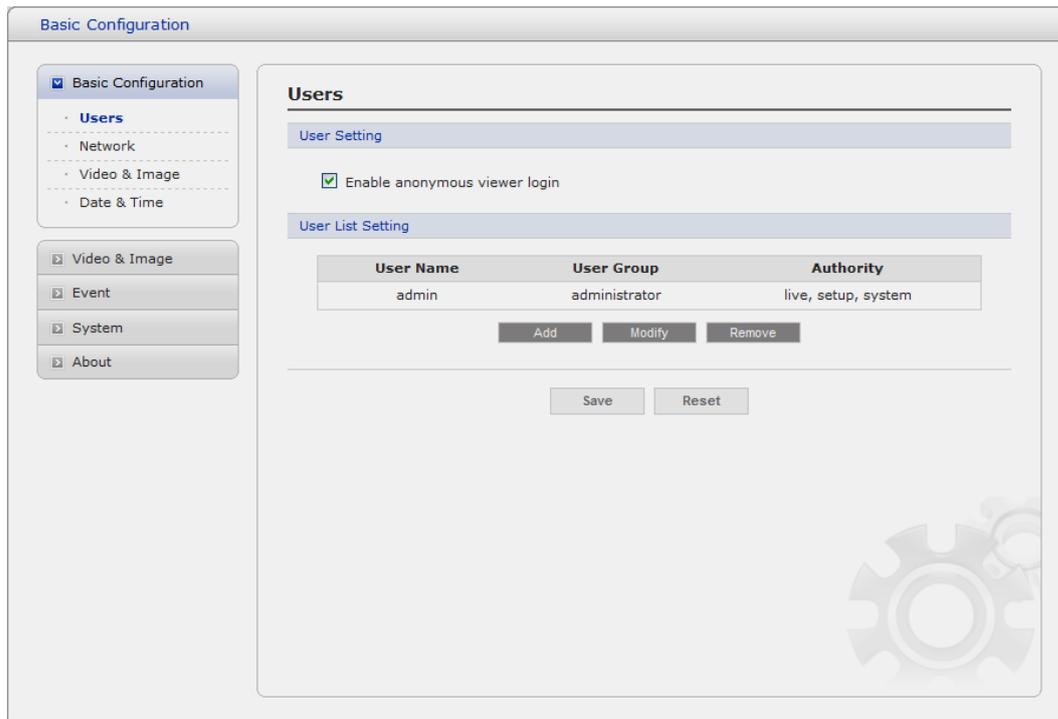

The **user list** displays the authorized users and user groups (levels):

User Group	Authority
Guest	Provides the lowest level of access, which only allows access to the Live View page.
Operator	An operator can view the Live View page, create and modify events, and adjust certain other settings. Operators have no access to System Options.
Administrator	An administrator has unrestricted access to the Setup tools and can determine the registration of all other users.

- **Enable anonymous viewer login:** Check the box to use the webcasting features. Refer to “Video & Image” for more details.

2) Network

The VK2-1080VFD supports both IP version 4 and IP version 6. Both versions may be enabled simultaneously, and at least one version must always be enabled. When using IPv4, the IP address for the camera can be set automatically via DHCP, or a static IP address can be set manually. If IPv6 is enabled, the cameras receive an IP address according to the configuration in the network router. There is also the option of using the Internet Dynamic DNS Service. For more information on setting the Network, please see Setup> System>Security>Network.

The screenshot shows the 'Basic Configuration' web interface. On the left, a navigation menu includes 'Basic Configuration' (selected), 'Users', 'Network' (selected), 'Video & Image', 'Date & Time', 'Video & Image', 'Event', 'System', and 'About'. The main content area is titled 'Network' and contains the 'IP Address Configuration' section. Two radio buttons are present: 'Obtain IP address via DHCP' (unselected) and 'Use the following IP address:' (selected). Below the selected option, there are three input fields: 'IP address' with the value '192 . 168 . 12 . 210', 'Subnet mask' with '255 . 255 . 255 . 0', and 'Default router' with '192 . 168 . 12 . 20'. At the bottom of the configuration area, there are 'Save' and 'Reset' buttons. A faint gear icon is visible in the background of the main content area.


- **Obtain IP address via DHCP** - Dynamic Host Configuration Protocol (DHCP) is a protocol that lets network administrators centrally manage and automate the assignment of IP addresses on a network. DHCP is enabled by default. Although a DHCP server is mostly used to set an IP address dynamically, it is also possible to use it to set a static, known IP address for a particular MAC address.
- **Use the following IP address** - To use a static IP address for the VK2-1080VFD, check the button and then make the following settings:
 - **IP address:** Specify a unique IP address for your VK2-1080VFD.
 - **Subnet mask:** Specify the mask for the subnet the VK2-1080VFD is located on.
 - **Default router:** Specify the IP address of the default router (gateway) used for connecting devices attached to different networks and network segments.

Notes:

1. DHCP should only be enabled if using dynamic IP address notification, or if your DHCP server can update a DNS server, which then allows you to access the VK2-1080VFD by name (host name). If DHCP is enabled and you cannot access the unit, you may have to reset it to the factory default settings and then perform the installation again.
2. The ARP/Ping service is automatically disabled two minutes after the unit is started, or as soon as an IP address is set.

- Pinging the unit is still possible when this service is disabled.

3) Video & Image

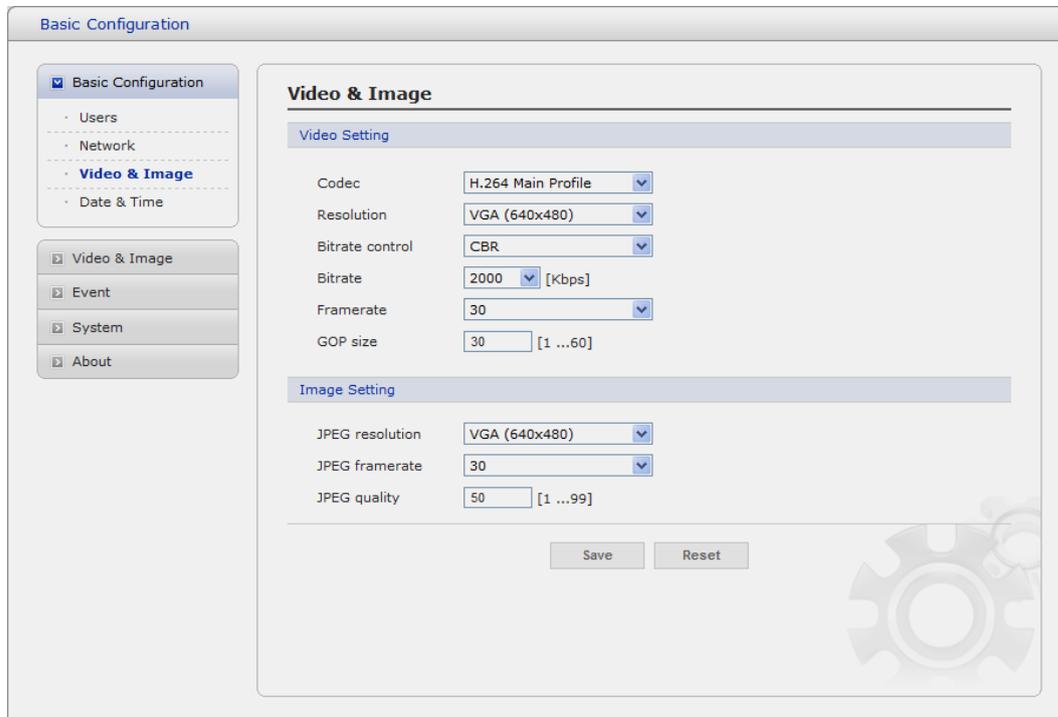

- Video Setting**

- Codec:**

- The codec settings are separated into MPEG4 and H.264.

- H.264 is also known as MPEG-4 Part 10. This is the new generation compression standard for digital video. This function offers higher video resolution than Motion JPEG or MPEG-4 at the same bit rate and bandwidth, or the same quality video at a lower bit rate.

- Profile:**

- There are 4 pre-programmed stream profiles available for quick set-up.

- Choose the form of video encoding you wish to use from the drop-down list:

- * H.264 MP(Main Profile):**

- Primarily for low-cost applications that requires additional error robustness, this profile is used rarely in videoconferencing and mobile applications, it does add additional error resilience tools to the Constrained Baseline Profile. The importance of this profile is fading after the Constrained Baseline Profile has been defined.

- * H.264 BP(Base Profile):**

- Originally intended as the mainstream consumer profile for broadcast and storage applications, the importance of this profile faded when the High profile was developed for those applications.

- * MPEG4 SP(Simple Profile):**

- Mostly aimed for use in situations where low bit rate and low resolution are mandated by other conditions of the applications, like network bandwidth, device size etc.

* **MPEG4 ASP(Advanced Simple Profile):**

Its notable technical features relative to the Simple Profile, which is roughly similar to H.263, including "MPEG"-style quantization, interlaced video, B pictures (also known as B Frames), Quarter Pixel motion compensation (Qpel), Global motion compensation (GMC).

- **Resolution:**

It enables users to determine a basic screen size when having an access through the Web Browser or PC program. The screen size control comes in seven modes like 1920x1080, 1280x1024, 1280x720, 704x480(576), 640x480, 352x240(288), and 320x240. Users can reset the selected screen size anytime while monitoring the screen on a real-time basis.

- **Bitrate control:**

Limiting the maximum bit rate helps control the bandwidth used by the H.264 or MPEG-4 video stream. Leaving the Maximum bit rate as unlimited maintains consistently good image quality but increases bandwidth usage when there is more activity in the image. Limiting the bit rate to a defined value prevents excessive bandwidth usage, but images are lost when the limit is exceeded.

Note that the maximum bit rate can be used for both variable and constant bit rates.

The bit rate can be set as Variable Bit Rate (VBR) or Constant Bit Rate (CBR). VBR adjusts the bit rate according to the image complexity, using up bandwidth for increased activity in the image, and less for lower activity in the monitored area.

CBR allows you to set a fixed target bitrate that consumes a predictable amount of bandwidth. As the bit rate would usually need to increase for increased image activity, but in this case cannot, the frame rate and image quality are affected negatively. To partly compensate for this, it is possible to prioritize either the frame rate or the image quality whenever the bit rate needs to be increased. Not setting a priority means the frame rate and image quality are equally affected.

- **Compression:**

When it is necessary to adjust a smooth transmission status according to network situations, users can increase the compressibility to carry out the network transmission stably. On the other hand, when it is necessary to maintain a detailed monitoring screen by enhancing the image quality, users can do so by decreasing the compressibility. In ease case, please adjust this function according to the network status and monitoring purposes. The default is 2000(Kbps).

- **Frame rate:**

Upon the real-time play, users should select a frame refresh rate per second. If the rate is high, the image will become smooth. On the other hand, if the rate is low, the image will not be natural but it can reduce a network load.

- **GOP size:**

Select the GOP(Group of Picture) size. If users want to have a high quality of fast image one by one, please decrease the value. For the purpose of general monitoring, please do not change a basic value. Such act may cause a problem to the system performance. For the details of GOP setting, please contact the service center.

- **Image Setting**

Sometimes the image size is large due to low light or complex scenery. Adjusting the frame rate and quality helps to control the bandwidth and storage used by the Motion JPEG video stream in these situations. Limiting the frame rate and quality optimizes bandwidth and storage usage, but may give poor image quality. To prevent increased bandwidth and storage usage, the Resolution, Frame rate, and Frame Quality should be set to an optimal value.

- **JPEG resolution:**
Same as the video settings.
- **JPEG frame rate:**
Same as the video settings.
- **JPEG quality:**
Select the picture quality. If users want to have a high quality of fast image one by one, please decrease the value. For the purpose of general monitoring, please do not change a basic value. Such act may cause a problem to the system performance.

When satisfied with the settings, click **Save**, or click **Reset** to revert to previously saved settings.

4) Date & Time

The screenshot displays the 'Basic Configuration' web interface. On the left is a navigation menu with options: Basic Configuration (selected), Users, Network, Video & Image, Date & Time, Video & Image, Event, System, and About. The main content area is titled 'Date & Time' and contains the following settings:

- Current Server Time:** Date: 2010-07-29, Time: 12:20:41
- New Server Time:**
 - Time zone: (GMT+09:00) Seoul
 - Automatically adjustment for daylight saving time changes
- Time mode:**
 - Synchronize with computer time
Date: 2010-07-29, Time: 12:20:59
 - Synchronize with NTP server
NTP server: time.nist.gov, NTP Interval: 12 [hour]
 - Set manually
Date: 2010-07-29, Time: 12:19:33
- Date & Time Format:**
 - Date Format: YYYY-MM-DD
 - Time Format: 24 Hour

At the bottom of the settings area are 'Save' and 'Reset' buttons.

- **Current Server Time**
It displays the current date and time (24h clock). The time can be displayed in 12h clock format in the overlay (see below).
- **New Server Time**
Select your time zone from the drop-down list. If you want the server clock to automatically adjust for daylight savings time, select the “Automatically adjustment for daylight saving time changes”.

From the **Time Mode** section, select the preferred method to use for setting the time:

- **Synchronize with computer time:** sets the time from the clock on your computer.
- **Synchronize with NTP Server:** the camera will obtain the time from an NTP server every 60 minutes.
- **Set manually:** this option allows you to manually set the time and date.


3.6.2 Video & Image

1) Basic

The screenshot shows a web-based configuration interface for video and image settings. On the left is a sidebar menu with options: Basic Configuration, Video & Image (selected), Event, System, and About. Under 'Video & Image', there are sub-options: Basic (selected), Appearance, Privacy Masking, and Webcasting. The main content area is titled 'Video & Image - Basic' and is divided into two sections: 'Video Setting' and 'Image Setting'.
Video Setting:
 Codec: H.264 Main Profile (dropdown)
 Resolution: VGA (640x480) (dropdown)
 Bitrate control: CBR (dropdown)
 Bitrate: 2000 [Kbps] (dropdown)
 Framerate: 30 (dropdown)
 GOP size: 30 [1 ...60] (text input)
Image Setting:
 JPEG resolution: VGA (640x480) (dropdown)
 JPEG framerate: 30 (dropdown)
 JPEG quality: 50 [1 ...99] (text input)
 At the bottom of the main area are 'Save' and 'Reset' buttons. A decorative graphic of a film reel and clapperboard is visible in the bottom right corner of the configuration area.

Refer to “3.6.1 Basic Configuration > Video & Image” for more details.

2) Appearance

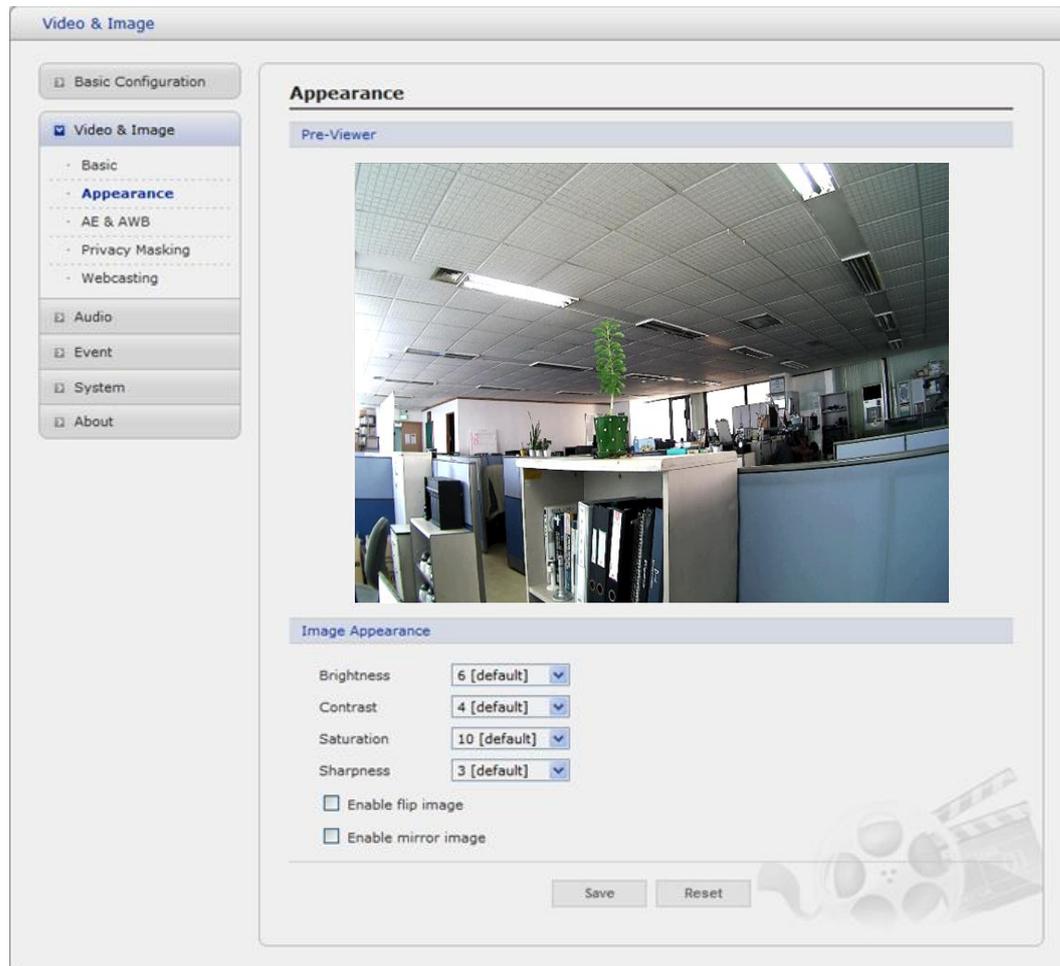


- **Image Appearance**

This page provides access to the advanced image settings for the VK2-1080VFD.

- **Brightness:** The image brightness can be adjusted in the range 1-10, where a higher value produces a brighter image.
- **Colour level:** Select an appropriate level by entering a value in the range 1-10. Lower values mean less colour saturation.
- **Saturation:** Adjust the image's contrast by raising or lowering the value in this field.
- **Sharpness:** Controls the amount of sharpening applied to the image. A sharper image might increase image noise especially in low light conditions. A lower setting reduces image noise, but the image would be less sharp.
- **Enable flip image:** Check this checkbox to flip the image.
- **Enable mirror image:** Check this checkbox to mirror the image.

3) AE & AWB

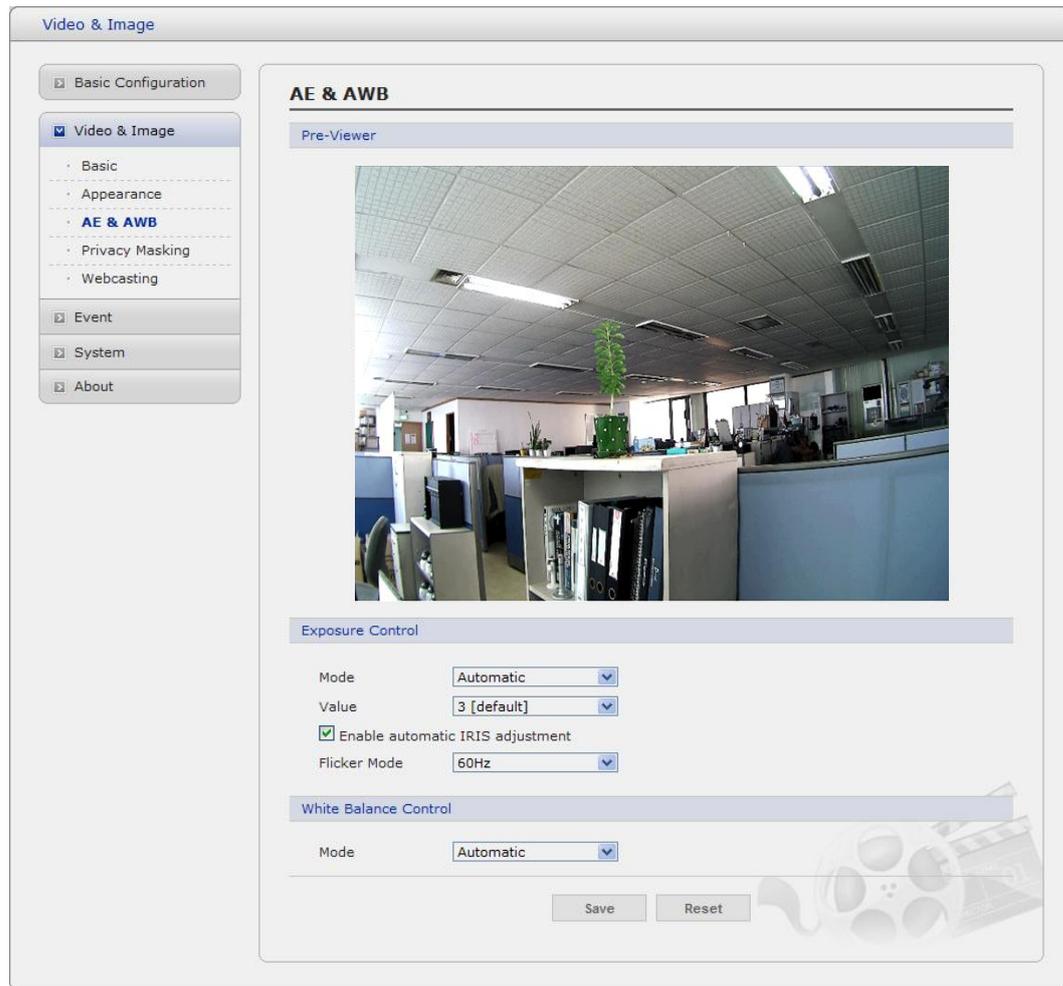

This page provides access to set the exposure and white balance of the VK2-1080VFD.

- **Exposure Control**

Configure the exposure settings to suit the image quality requirements in relation to lighting consideration.

- **Mode:** Supports exposure modes to control the amount of light detected by the camera sensor based on settings for light conditions. The default setting is Auto with DC-IRIS.
 - * **Automatic:** Automatically sets the amount of light detected by the DC-IRIS and AGC.
 - * **Hold Current:** Fixes the exposure at its current state.
- **Value:** Select a value in the drop-down list to tune the exposure. The default setting is 3.
- **Enable automatic IRIS adjustment:** This checkbox should always be set to be **checked**, except during focusing, or when using a fixed iris lens.
- **Flicker Mode:** Provides the options for flicker.
 - * **50Hz:** Select at 50 Hz environments.
 - * **60Hz:** Select at 60 Hz environments.


- **White Balance Control**

This adjusts the relative amount of red, green and blue primary colours in the image so that the neutral colours are reproduced correctly. The camera can be set to automatically adjust for the type of light and compensate for its colour. Alternatively, the type of light source can be set manually.

From the drop-down list, select the white balance setting suitable for the lighting used for your camera. The available options are:

- **Automatic:** Automatic identification and compensation for the light source colour. This can be used in most situations and is the recommended setting.
- **Fixed Indoor:** Fixed colour adjustment, ideal for a room with incandescent (a glow) lighting and good for a normal colour temperature around 2600K.
- **Fixed Fluorescent 1:** Fixed colour adjustment; good for fluorescent lighting with a colour temperature around 4000K.
- **Fixed Fluorescent 2:** Fixed colour adjustment; good for fluorescent lighting with a colour temperature around 5000K.
- **Fixed Outdoor 1:** Fixed colour adjustment for sunny, with a colour temperature around 6500K.
- **Fixed Outdoor 2:** Fixed colour adjustment for cloudy, with a colour temperature around 7500K.

4) Day & Night

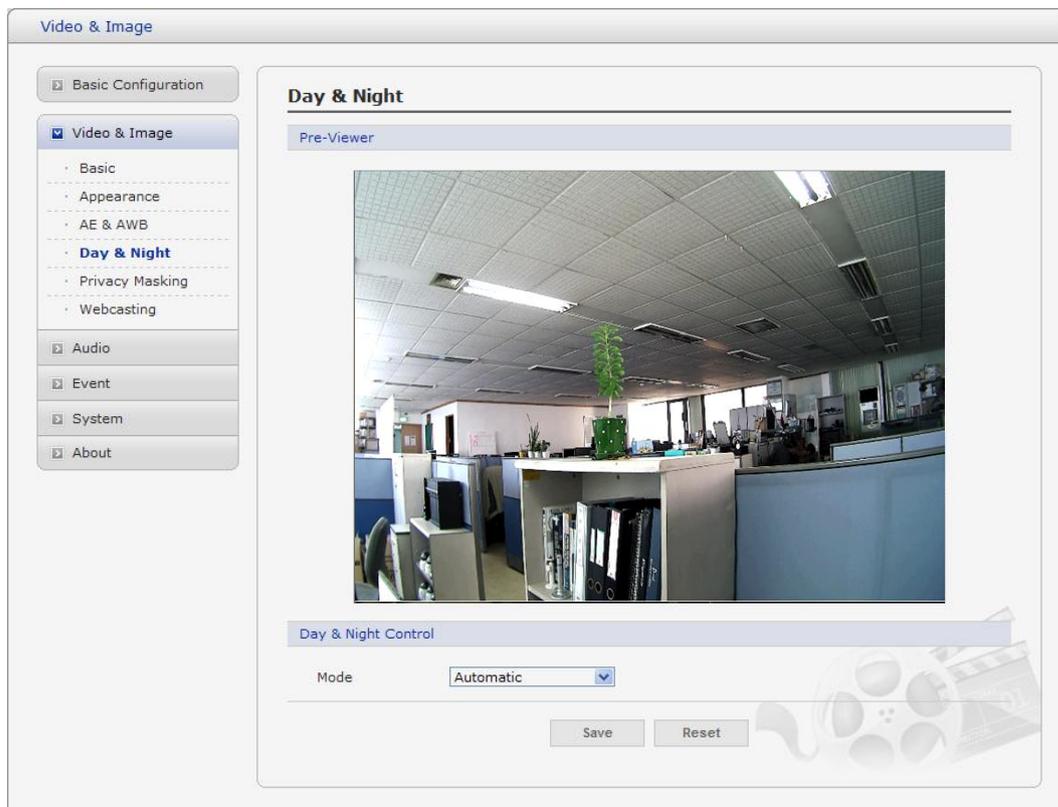


Select the day/night mode from among three modes.

- **Automatic:** Normally works in day mode. It switches automatically to night mode in a dark place.
- **Day:** Always works in day mode.
- **Night:** Always works in night mode.

5) Privacy Masking - Basic

The privacy masking function allows you to mask parts of the video image to be transmitted. You can set up to eight privacy masks and the colour of privacy masks is black.

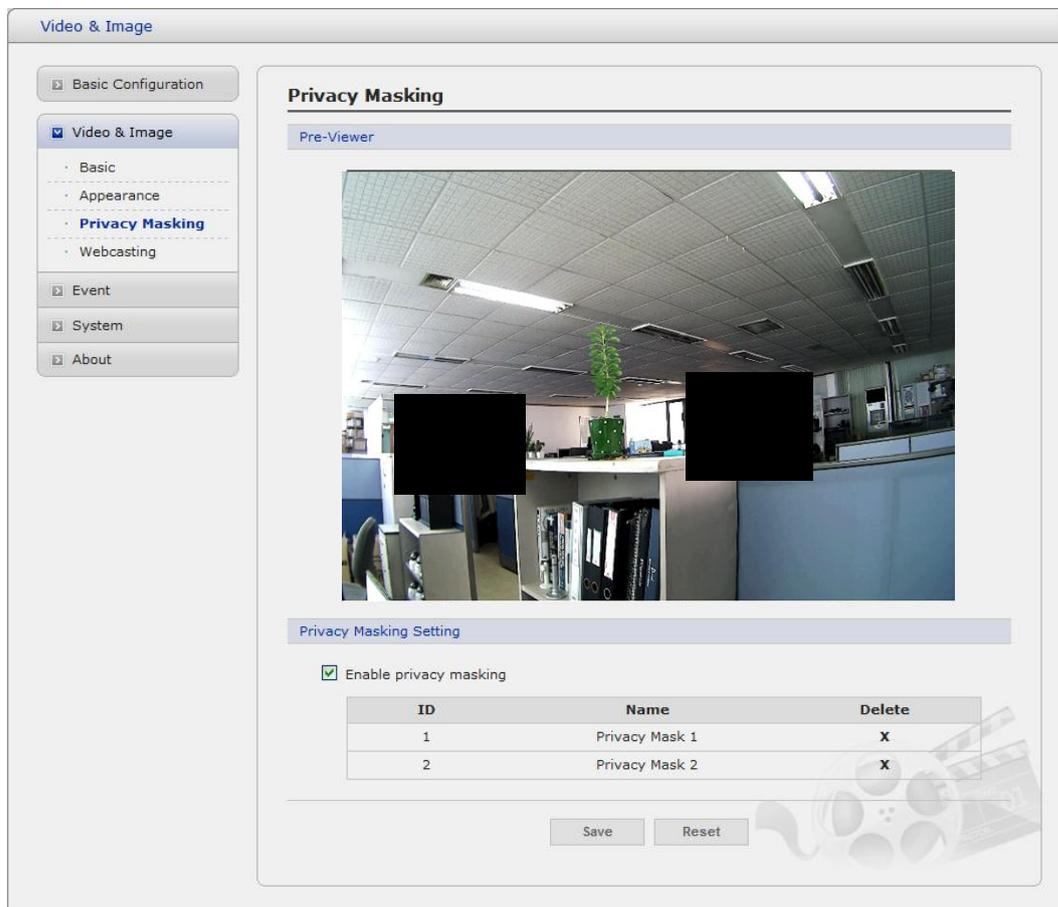

The privacy masks are configured by Mask windows. Each window can be selected by clicking with the mouse. It is also possible to **resize or delete, or move** the window, by selecting the appropriate window at the mouse menu on the video screen.




To create a mask window, follow steps:

1. Click the right button of mouse to see the mouse menu.
2. Select New Privacy Mask in the mouse menu.
3. Click and drag mouse to designate a mask window area.

You can also modify or delete a motion index. Select an index and then, modify items or delete button. Select "Enable" to activate the privacy masking function.

6) Webcasting – Channel1

The VK2-1080VFD can stream live video to a website. Copy the HTML code generated on the screen and paste it into the page code of the website you want to display live video.

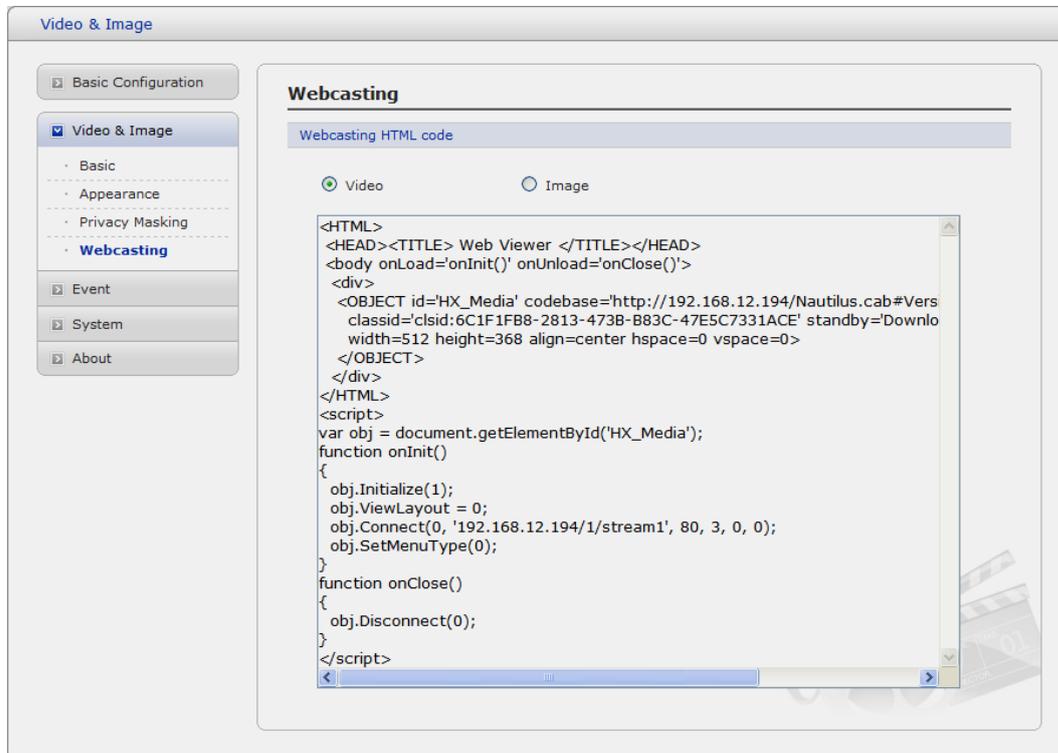

The screenshot shows a configuration window titled "Video & Image". On the left is a sidebar with a tree view containing "Basic Configuration", "Video & Image" (selected), "Event", "System", and "About". Under "Video & Image", there are sub-items: "Basic", "Appearance", "Privacy Masking", and "Webcasting" (highlighted). The main area is titled "Webcasting" and contains a section "Webcasting HTML code". Below this, there are two radio buttons: "Video" (selected) and "Image". A text area contains the following HTML and JavaScript code:


```
<HTML>
<HEAD><TITLE> Web Viewer </TITLE></HEAD>
<body onLoad='onInit()' onUnload='onClose()>
<div>
<OBJECT id='HX_Media' codebase='http://192.168.12.194/Nautilus.cab#Vers
classid='clsid:6C1F1FB8-2813-473B-B83C-47E5C7331ACE' standby='Downlo
width=512 height=368 align=center hspace=0 vspace=0>
</OBJECT>
</div>
</HTML>
<script>
var obj = document.getElementById('HX_Media');
function onInit()
{
obj.Initialize(1);
obj.ViewLayout = 0;
obj.Connect(0, '192.168.12.194/1/stream1', 80, 3, 0, 0);
obj.SetMenuType(0);
}
function onClose()
{
obj.Disconnect(0);
}
</script>
```

Note: To use webcasting service, the Enable Anonymous viewer login option must be checked. Refer to "Basic Configuration > Users" for more details.

3.6.3 Event

1) Event-In

▼ On Boot

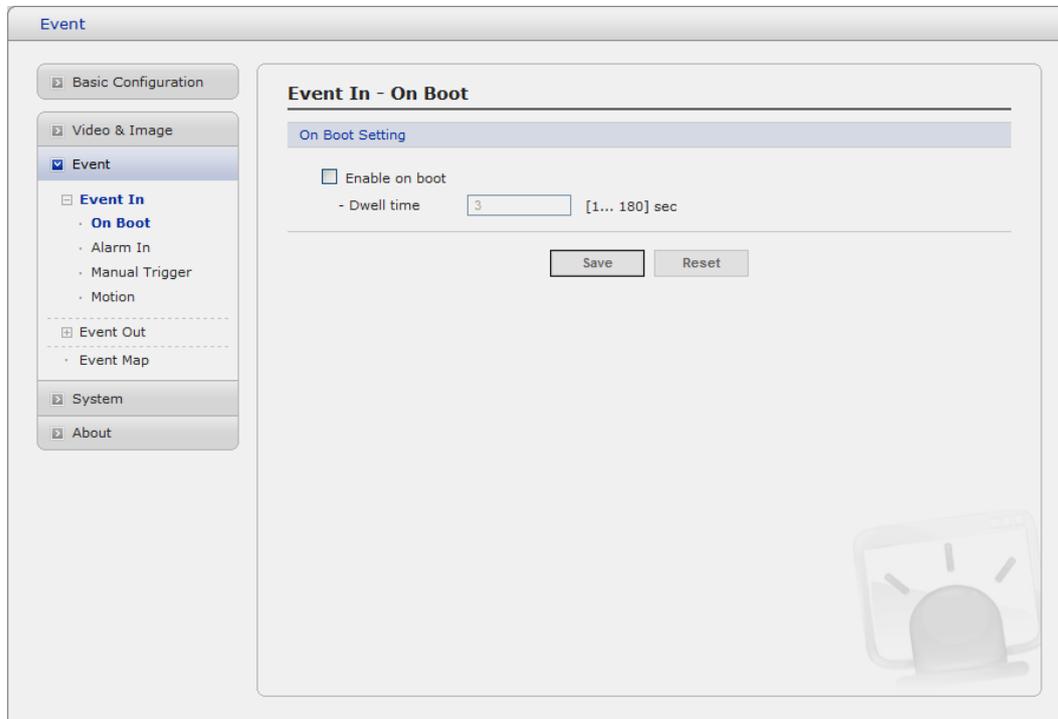

This is used to trigger the event every time the Network Transmitter is started. Select "Enable" to activate the motion event.

▼ Alarm In

Event

- Basic Configuration
- Video & Image
- Event
 - Event In
 - On Boot
 - Alarm In
 - Manual Trigger
 - Motion
 - Event Out
 - Event Map
- System
- About

Event In - Alarm In

Alarm In Port 1 Setting

Enable alarm in port 1

- Type

- Dwell time [1... 180] sec

Select “Enable” to activate the alarm event. The VK2-1080VFD supports 1 alarm input port.

- **Type:** Choose the type of alarm you wish to use from the drop-down list.
- **Dwell Time:** Set the dwell time an event lasts from the point of detection of an alarm input.

▼ Manual Trigger

Event

- Basic Configuration
- Video & Image
- Event
 - Event In
 - On Boot
 - Alarm In
 - Manual Trigger
 - Motion
 - Event Out
 - Event Map
- System
- About

Event In - Manual Trigger

Manual Trigger 1 Setting

Enable manual trigger 1

- Dwell time [1... 180] sec

Manual Trigger 2 Setting

Enable manual trigger 2

- Dwell time [1... 180] sec

Manual Trigger 3 Setting

Enable manual trigger 3

- Dwell time [1... 180] sec


Manual Trigger 4 Setting

Enable manual trigger 4

- Dwell time [1... 180] sec

This option makes use of the manual trigger button provided on the live view page, which are used to start or stop the event type manually. Alternatively the event can be triggered via the product's API (Application Programming Interface).

▼ **Motion**

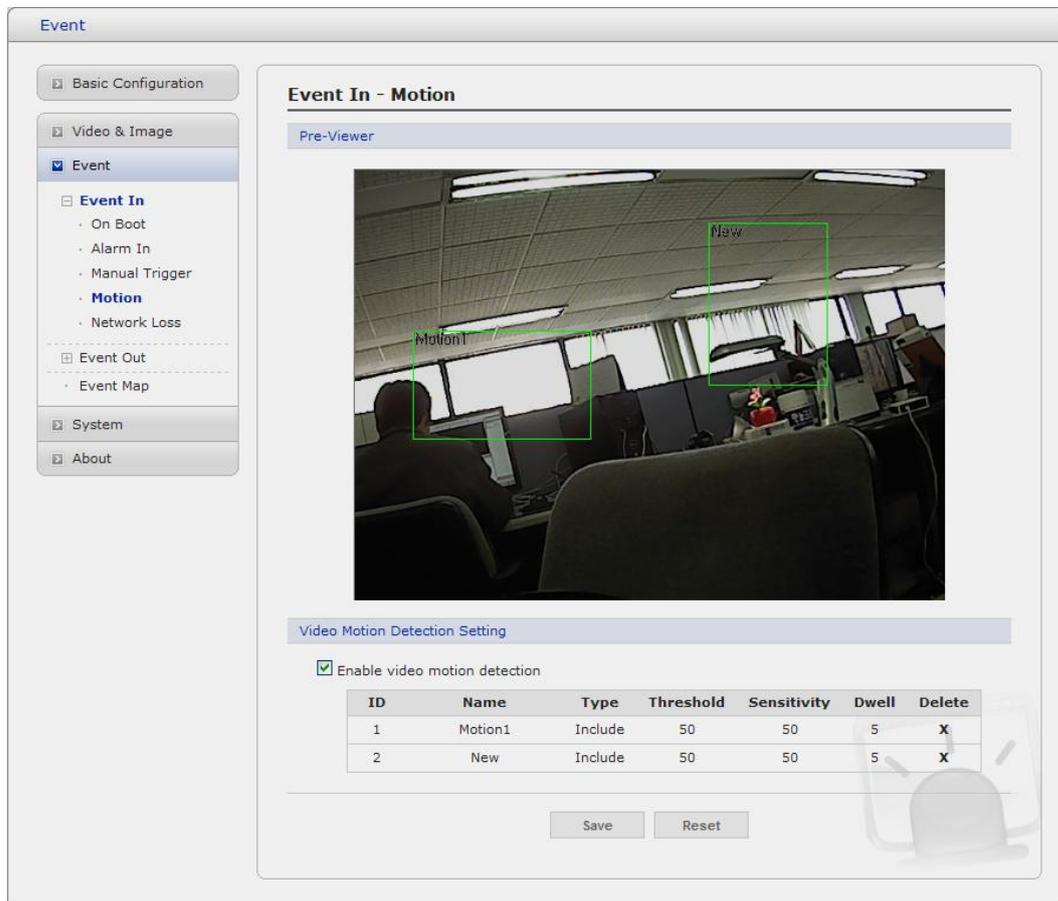

Motion detection is used to generate an alarm whenever movement occurs (or stops) in the video image. A total of 8 Motion and/or Mask windows can be created and configured.

Motion is detected in defined **Motion** windows, which are placed in the video image to target specific areas. Movement in the areas outside the motion windows will be ignored. If part of a motion window needs to be masked, this can be configured in a **Mask** window.

- **Pre-Viewer**

Motion detection windows are configured by Motion or Mask windows. Each window can be selected by clicking with the mouse. It is also possible to **resize or delete, or move** the window, by selecting the appropriate window at the mouse menu on the video screen.



To create a motion or mask window, follow steps:

1. Click the right button of mouse to see the mouse menu.
2. Select New Motion (or Mask) Window in the mouse menu.
3. Click and drag mouse to designate a motion area.

- **Motion Detection Setting**

The behaviour for each window is defined by adjusting the Threshold and Sensitivity, as described below.

A motion index is a set of parameters describing Window Name, Type, Threshold, Sensitivity, and Dwell Time. Window Types is one of Motion and Mask windows.


- **Threshold:** Sets up the sensitivity for the motion detection.
- **Sensitivity:** Sets up the sensitivity for the motion detection.
- **Dwell Time:** Set the hold time an event lasts for the specified hold time from the point of detection of a motion.

You can also modify or delete a motion index. Select an index and then, click the Modify or Delete button.

Select "Enable" to activate the motion window.

▼ Network Loss

This is used to trigger the event every time the network connection fails. Select "Enable" to activate the Network Loss event

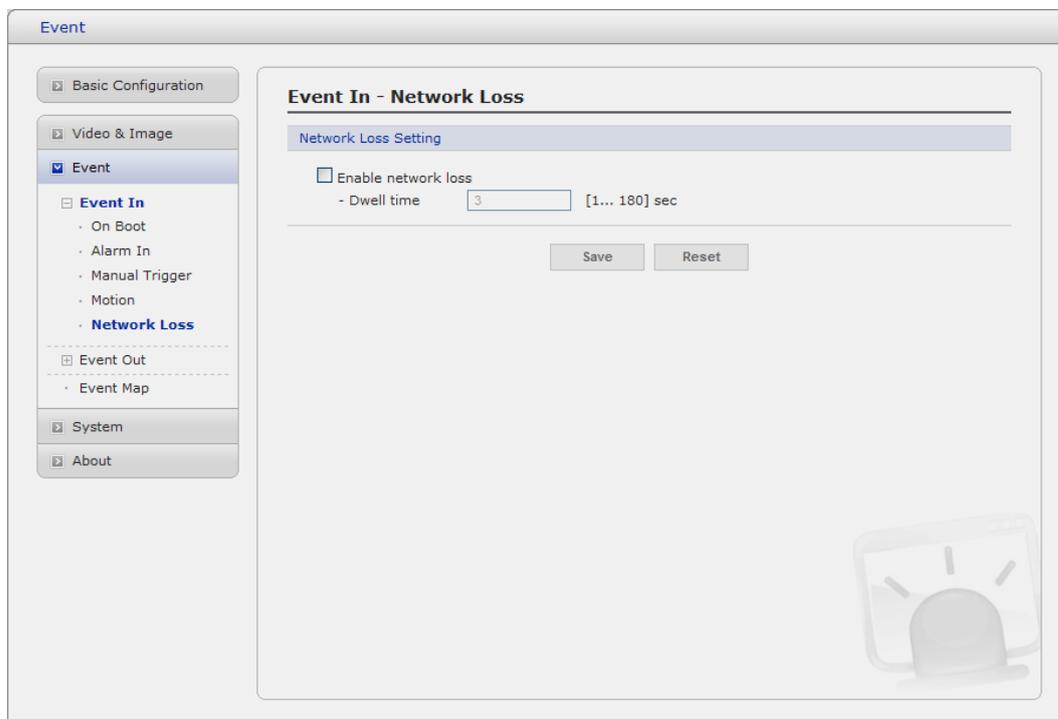

2) Event-Out

▼ SMTP(E-Mail)

The VK2-1080VFD can be configured to send event and error email messages via SMTP (Simple Mail Transfer Protocol).

- **SMTP(E-Mail) Setting**

Select “Enable” to activate the SMTP operation.

- **Mail Server/Port:** Enter the host names (or IP addresses) and port numbers for your mail server in the fields provided, to enable the sending of notifications and image email messages from the camera to predefined addresses via SMTP.
- **Sender:** Enter the email address to be used as the sender for all messages sent by the Network Transmitter.
- **Interval:** Represents the frequency of the email notification when an event occurs.
- **Aggregate events:** Shows the maximum number of emails sent within each interval.

If your mail server requires authentication, check the box for Use authentication to log in to this server and enter the necessary information.

- **User Name/Password:** Enter the User Name and Password as provided by your

network administrator or ISP (Internet Service Provider).

To ensure that the login procedure is performed as securely as possible when using SMTP authentication, you must define the weakest authentication method allowed.

- **Login Method:** Set the Weakest method allowed to the highest/safest method supported by the mail server. The most secure method is listed in the drop-down list:
Login / Plain
- **SMTP(E-Mail) Receiver**
 - **Receiver:** Enter an email address. You can also register the e-mail address of recipients up to 8.
- **SMTP(E-Mail) Test**
 - **Receiver:** Enter an email address and click the Test button to test that the mail servers are functioning and that the email address is valid.

▼ FTP & JPEG

The screenshot shows a web-based configuration interface for an event camera. The main menu on the left includes 'Basic Configuration', 'Video & Image', 'Event', 'System', and 'About'. The 'Event' menu is expanded to show 'Event In', 'Event Out', and 'Event Map'. Under 'Event Out', 'FTP & JPEG' is selected. The configuration page is titled 'Event Out - FTP & JPEG' and contains two sections: 'FTP Setting' and 'JPEG Setting'. The 'FTP Setting' section has a checkbox for 'Enable FTP', a 'Server' input field, a 'Port' input field (set to 21), a 'Remote directory' input field, a 'User name' input field, a 'Password' input field, and checkboxes for 'Passive mode' and 'Anonymous login'. The 'JPEG Setting' section has 'Pre-event' and 'Post-event' settings, each with 'Time' and 'FPS' input fields. The 'Prefix file name' is set to 'basename_'. The 'Additional suffix' is set to 'Date/Time'. There are 'Save' and 'Reset' buttons at the bottom of the configuration area.

When the VK2-1080VFD detects an event, it can record and saves images to an FTP server. Images can be sent as e-mail attachments. Check the box to enable the service.

• FTP Setting

- **Server:** Enter the server's IP address or host name. Note that a DNS server must be specified in the TCP/IP network settings if using a host name.
- **Port:** Enter the port number used by the FTP server. The default is 21.
- **Use passive mode:** Under normal circumstances the VK2-1080VFD simply requests the target FTP server to open the data connection. Checking this box issues a PASV command to the FTP server and establishes a passive FTP connection; whereby the VK2-1080VFD actively initiates both the FTP control and data connections to the target server. This is normally desirable if there is a firewall between the camera and the target FTP server.
- **Remote directory:** Specify the path to the directory where the uploaded images will be stored. If this directory does not already exist on the FTP server, there will be an error message when uploading.
- **User name/Password:** Provide your log-in information.

• JPEG Setting

- **Pre-event:** A pre-event buffer contains images from the time immediately preceding the event trigger. These are stored internally in the server. This buffer can be very useful when checking to see what happened to cause the event trigger. Check the box to enable the pre-trigger buffer, enter the desired total length in seconds, minutes or hours, and specify the required image frequency.
- **Post-event:** This function is the counterpart to the pre-trigger buffer described above and contains images from the time immediately after the trigger. Configure as for pre-event.
- **Prefix file name:** This name will be used for all the image files saved. If suffixes are also used, the file name will take the form <prefix>.<suffix>.<extension>
- **Additional suffix:** Add either a date/time suffix or, a sequence number - with or without a maximum value

▼ HTTP Server

The screenshot shows a web interface for configuring the HTTP Server. On the left is a navigation menu with categories: Basic Configuration, Video & Image, Event (selected), System, and About. Under the 'Event' category, there are sub-items: Event In, Event Out (selected), SMTP(E-Mail), FTP & JPEG, HTTP Server (highlighted), Alarm Out, Record, and Event Map. The main content area is titled 'Event Out - HTTP Server' and contains two sections: 'HTTP Server Setting' and 'HTTP Server Test'. In the 'HTTP Server Setting' section, there is a checkbox for 'Enable HTTP server'. Below it are four input fields: '- URL', '- Port' (with '80' entered), '- User name', and '- Password'. The 'HTTP Server Test' section has a 'Send message' input field and a 'Test' button. At the bottom of the main area are 'Save' and 'Reset' buttons. A faint watermark of a camera icon is visible in the bottom right corner of the interface.

When the VK2-1080VFD detects an event, HTTP Server is used to receive uploaded image files and/or notification messages. Check the box to enable the service.


- **HTTP Server Setting**

- **Name:** The name of the HTTP event server. Use a descriptive name.
- **URL:** The network address to the server and the script that will handle the request. For example: <http://192.168.12.244/cgi-bin/upload.cgi>
- **User name/Password:** Provide your log-in information.

- **HTTP Server Test**

When the setup is complete, the connection can be tested by clicking the Test button.

▼ Alarm Out

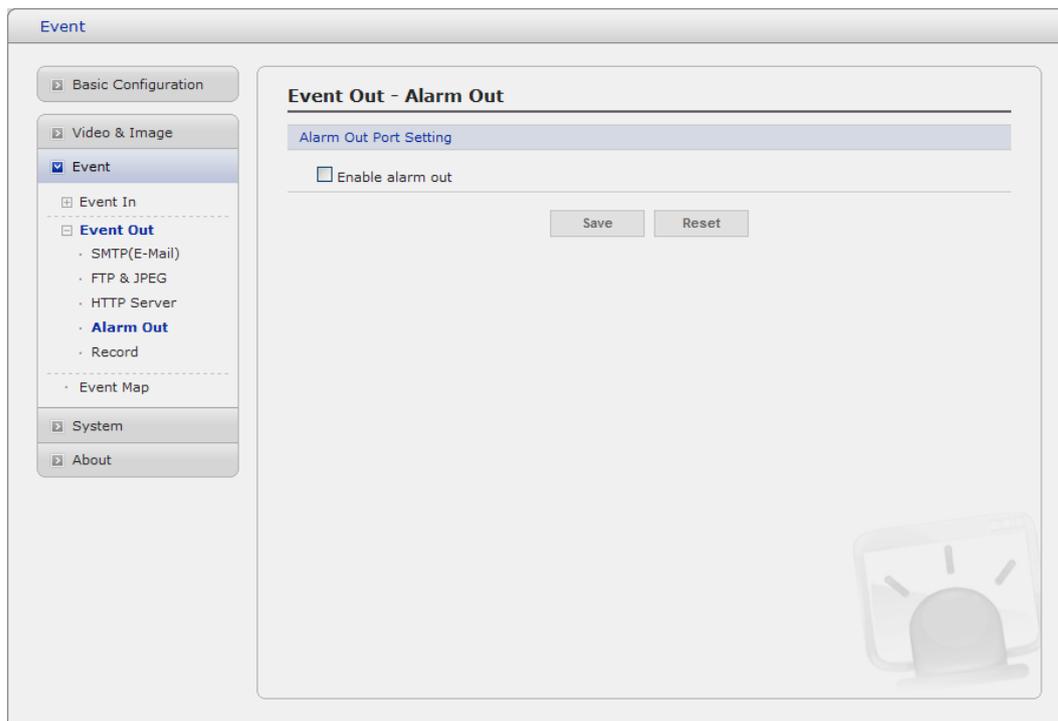

When the VK2-1080VFD detects an event, it can control external equipment connected to its alarm output port. Check the box to enable and then select either:

- **Enable:** When you select “**Enable alarm out**”, the output will be activated for as long as the event is active.

▼ Record

Event Out - Record

Record Setting

Enable Record

Overwrite

Continuous Record

* Note : Recommend more than 32GB capacity while continuous is setting.

- Stream Type: VIDEO

- Pre-event: 0 [0... 10] sec

- Post-event: 0 [0... 60] sec

Device Setting

Device Type: SD

Format

Device Status : No Storage [Format]

Device Remove

[Remove]

Device Information

Total	Used	Available	Used Percent	Bad Sector
0.00MB	0.00MB	0.00MB	0.00%	0.00%

[Save] [Reset]

When the VK2-1080VFD detects an event, it can record video stream to the Micro SD Memory (not supplied) or NAS (Network Attached Storage) as a storage device. Check the box to enable the service.

- **Record Setting**

- **Overwrite:** Click checkbox to overwrite the storage device.
- **Stream Type:** You can select VIDEO or IMAGE.
 - * **VIDEO:** H.264 or MPEG-4 data
 - * **IMAGE:** MJPEG data
- **Pre-event:** Enter pre-event time value for storage device pre-recording.
- **Post-event:** Enter post-event time value for storage device post-recording.


- **Device Setting**

Select Device Type to be recorded in the drop-down list.

- **SD:** built-in SD card
- **CIFS:** A file format for a NAS device.
- **NFS:** A file format for a NAS device.

Note1: Common Internet File System (CIFS) is a remote file access protocol that forms the basis for Windows file sharing, network printing, and various other network services. CIFS requires a large number of request/response transactions and its performance degrades significantly over high-latency WAN links such as the Internet.

Note2: Network File System (NFS) is a network file system protocol, allowing a user on a client computer to access files over a network in a manner similar to how local storage is accessed. NFS, like many other protocols, builds on the Open Network Computing Remote Procedure Call (ONC RPC) system.

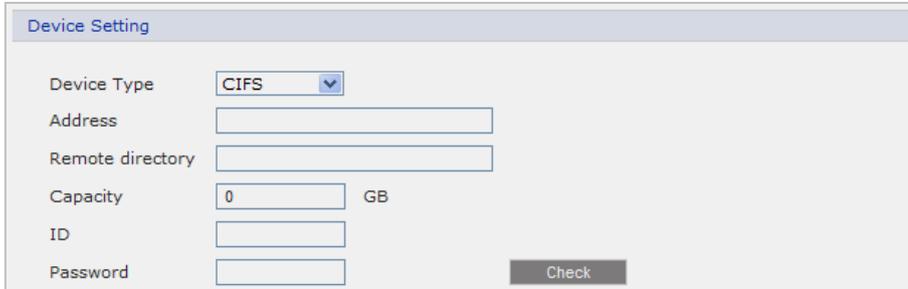

- * **Address:** Enter IP address for NAS device.
- * **Remote Directory:** Enter directory or folder location to be recorded in the NAS device.
- * **Capacity:** Enter the capacity of storage to be used. It must be less than the total storage capacity.
- * **IP/Password:** Enter ID and Password. The VK2-1080VFD will ask for them whenever access to the NAS device is requested.
- * **Check:** Press the Check button to check the validity of Device Setting data.


- **Format**

Click the Format button to format SD card.

- **Device Information**


Show current SD card information.

3) Event Map

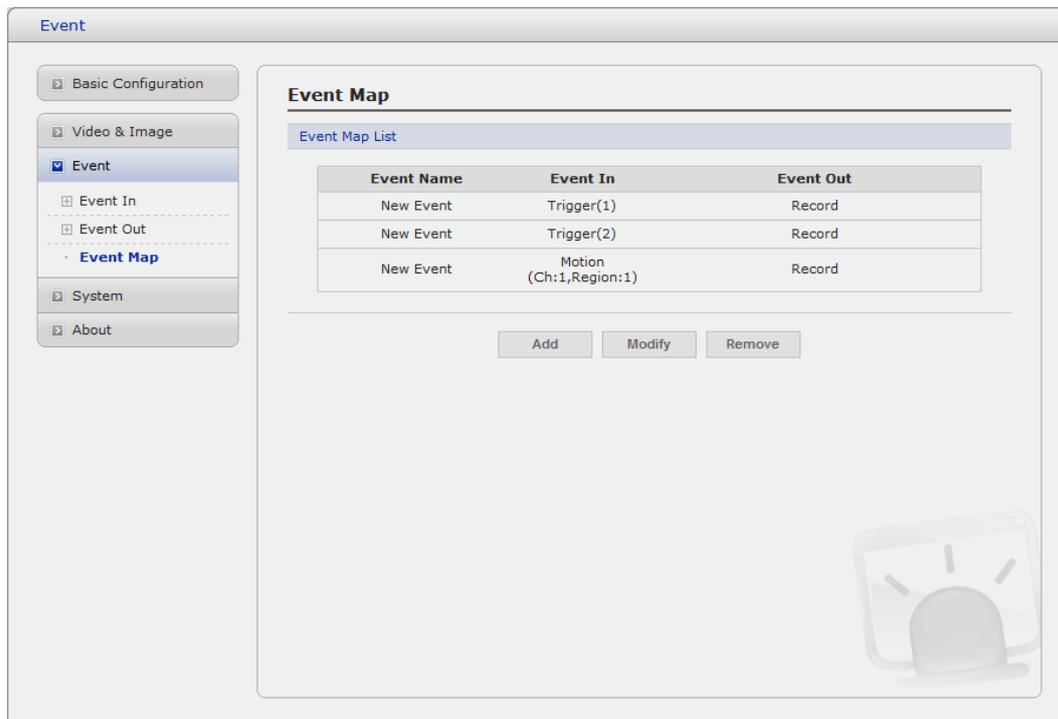

The event map allows you to change the settings and establish a schedule for each event trigger from the VK2-1080VFD. You can register up to a maximum of 15 event scenarios on the map.

Click Add button to make a new event map and you will see the following popup window:

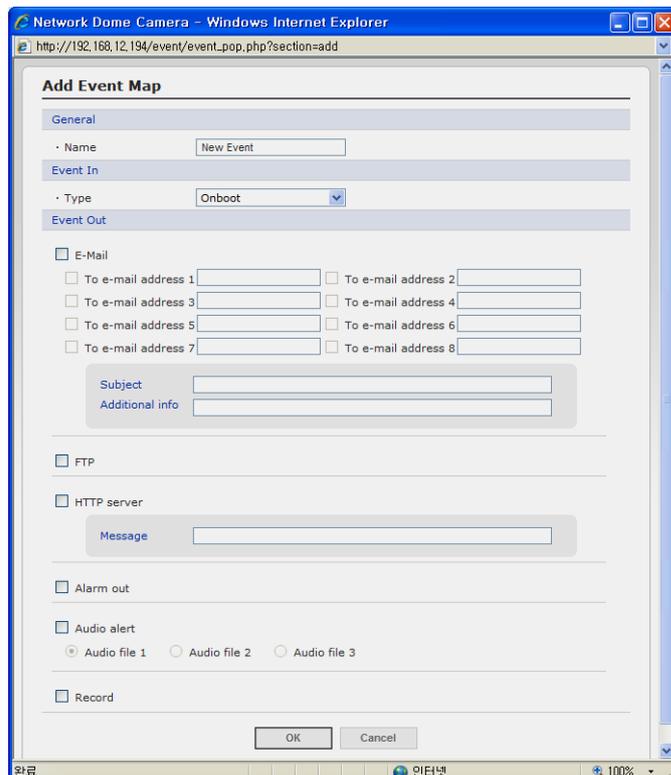

- **General**
Enter the name for a new event scenario.


- **Event In**
Select an event type in the drop down list.

- **Event Out**
 - **E-mail:** Select email addresses you want to send to, when an event has occurred.
 - **FTP:** Select checkbox beside FTP to record and saves images to an FTP server when an event has occurred.
 - **HTTP Server:** It sends notification messages to an HTTP server that listens for these. The destination server must first be configured on the EVENT IN page. Enter a message you want to send.
 - **Record:** Select Record checkbox to record video stream when an event has occurred. The Record option must first be configured on the EVENT OUT page.

3.6.4 System

1) Information

The name of the device and its location can be set, this can be very useful when interrogating the device once it has been installed.

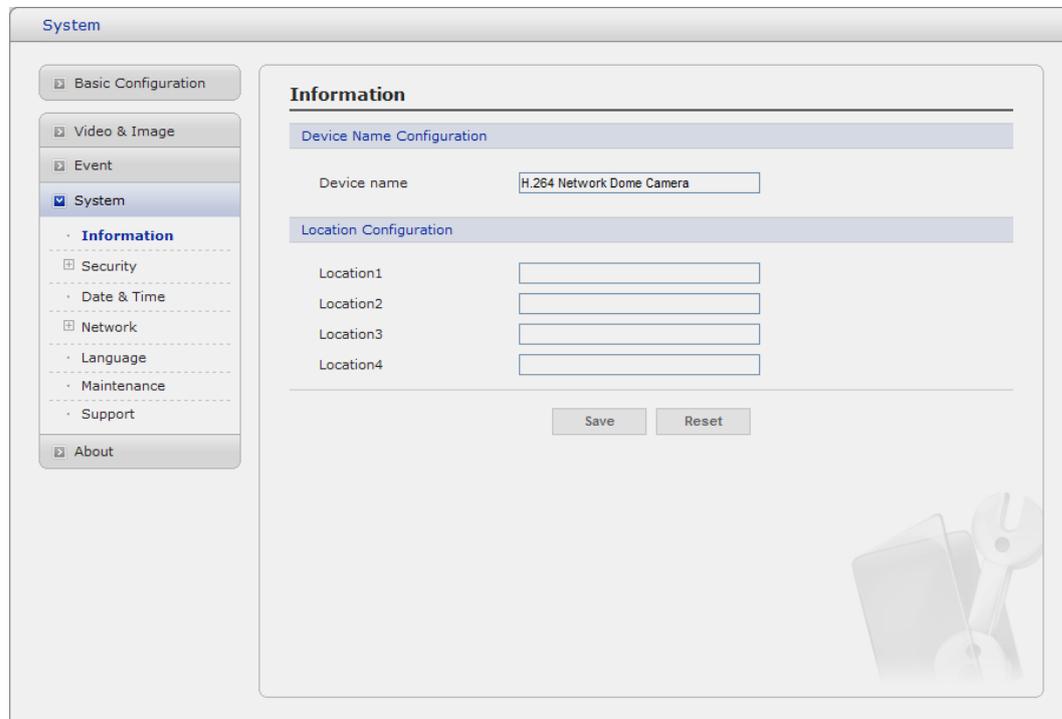


The screenshot displays a web-based configuration interface for a system. On the left, a sidebar menu is visible with the following items: Basic Configuration, Video & Image, Event, System (selected), Information (expanded), Security, Date & Time, Network, Language, Maintenance, Support, and About. The main content area is titled 'System' and contains the 'Information' section. This section is divided into two sub-sections: 'Device Name Configuration' and 'Location Configuration'. Under 'Device Name Configuration', there is a text input field labeled 'Device name' containing the text 'H.264 Network Dome Camera'. Under 'Location Configuration', there are four text input fields labeled 'Location1', 'Location2', 'Location3', and 'Location4', all of which are currently empty. At the bottom of the configuration area, there are two buttons: 'Save' and 'Reset'. A faint watermark of a laptop and a wrench is visible in the bottom right corner of the interface.

- **Device Name Configuration**
Enter the device name.
- **Location Configuration**
Enter the location information, up to 4 lines of text can be entered.

2) Security

▼ Users

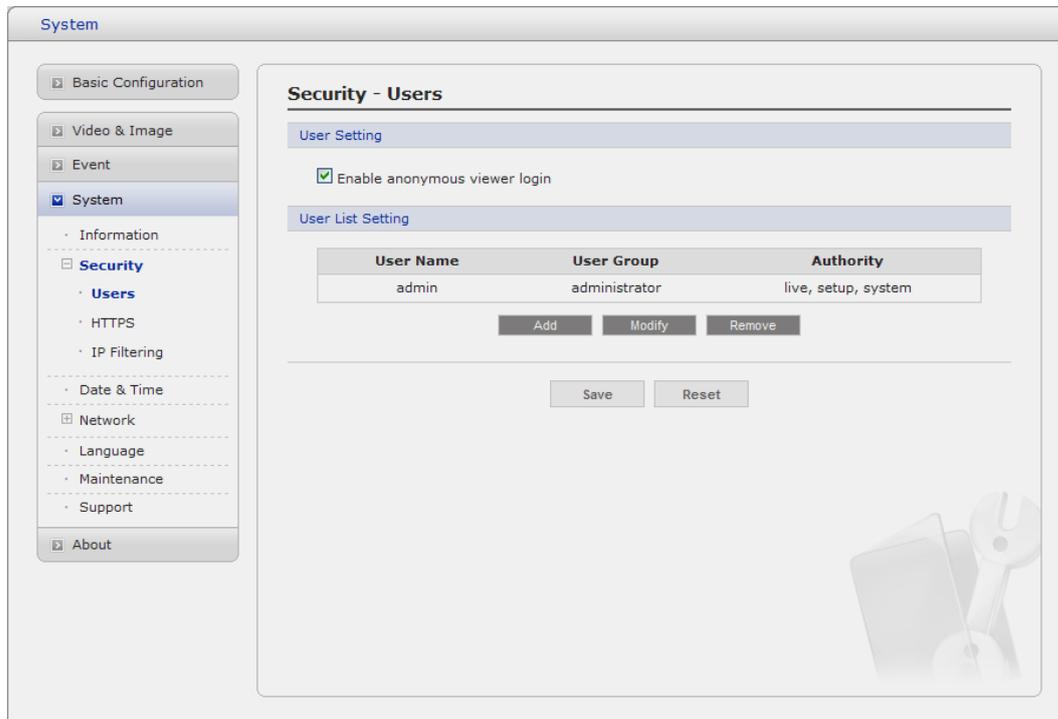

User access control is enabled by default, when the administrator sets the root password on first access. New users are authorized with user names and passwords, or the administrator can choose to allow anonymous viewer login to the Live View page, as described below:

- **User Setting**

Check the Enable Anonymous Viewer login box to allow free access to the VK2-1080VFD without the need for a user name or password.

- **User List Setting**


This section shows all registered user accounts. To enter a new user name and password, click the Add button. You will see the following pop-up window:

The 'Add User' pop-up window has a 'User Setting' section with the following fields:

- User name:
- Password:
- Confirm password:
- User group: (dropdown menu showing options: guest, operator, administrator)

At the bottom are 'OK' and 'Cancel' buttons.

▼ HTTPS

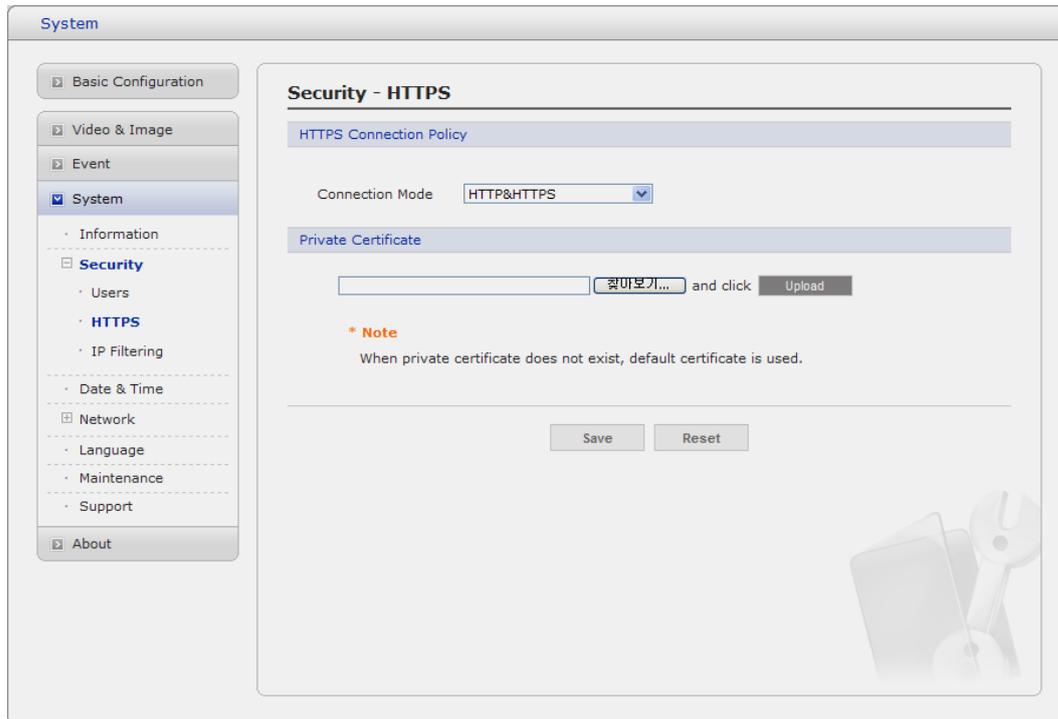

For greater security, the VK2-1080VFD can be configured to use HTTPS (Hypertext Transfer Protocol over SSL (Secure Socket Layer)). That is, all communication that would otherwise go via HTTP will instead go via an encrypted HTTPS connection.

- **HTTPS Connection Policy**

Choose the form of connection you wish to use from the drop-down list for the administrator, Operator and Viewer to enable HTTPS connection (set to HTTP by default).

- **HTTP**
- **HTTPS**
- **HTTP & HTTPS**

- **Upload Certificate**

To use HTTPS for communication with the VK2-1080VFD, An official certificate issued by a CA (Certificate Authority) must be uploaded from your PC. Provide the path to the certificate directly, or use the **Browse** button to locate it. Then click the **Upload** button.

Please refer to the home page of your preferred CA for information on where to send the request. For more information, please see the online help.

▼ IP Filtering

System

- Basic Configuration
- Video & Image
- Event
- System**
 - Information
 - Security**
 - Users
 - HTTPS
 - IP Filtering**
 - Date & Time
 - Network
 - Language
 - Maintenance
 - Support
- About

Security - IP Filtering

IP Filtering Setting

Enable IP filtering

On/Off	Priority	Policy	Start IP	End IP
<input type="checkbox"/>	1	ALLOW	0 . 0 . 0 . 0	0 . 0 . 0 . 0
<input type="checkbox"/>	2	ALLOW	0 . 0 . 0 . 0	0 . 0 . 0 . 0
<input type="checkbox"/>	3	ALLOW	0 . 0 . 0 . 0	0 . 0 . 0 . 0
<input type="checkbox"/>	4	ALLOW	0 . 0 . 0 . 0	0 . 0 . 0 . 0
<input type="checkbox"/>	5	ALLOW	0 . 0 . 0 . 0	0 . 0 . 0 . 0

Save Reset

Enable IP address filtering box enables the IP address filtering function. Up to 256 IP address entries may be specified (a single entry can contain multiple IP addresses). Click the **Add** button to add new filtered addresses.

Up to 5 ranges of address can be set, each range can be allowed or denied access to the camera.

Note that users from IP addresses that will be allowed must also be registered with the appropriate access rights (Guest, Operator or Administrator). This is done from Setup> System>Security>Users.

3) Date & Time

The screenshot shows a web-based configuration interface for a system. On the left is a navigation menu with categories: Basic Configuration, Video & Image, Event, System (selected), Information, Security, Date & Time (highlighted), Network, Language, Maintenance, Support, and About. The main content area is titled 'Date & Time' and contains several sections: 'Current Server Time' with date and time input fields; 'New Server Time' with a time zone dropdown (set to '(GMT+09:00) Seoul') and a checkbox for daylight saving time; 'Time mode' with three radio button options: 'Synchronize with computer time' (selected), 'Synchronize with NTP server' (with NTP server and interval fields), and 'Set manually'; and 'Date & Time Format' with dropdowns for date and time formats. 'Save' and 'Reset' buttons are at the bottom.

- **Current Server Time**

It displays the current date and time (24h clock). The time can be displayed in 12h clock format in the overlay (see below).

- **New Server Time**

Select your time zone from the drop-down list. If you want the server clock to automatically adjust for daylight savings time, select “Automatically adjustment for daylight saving time changes”.

From the Time Mode section, select the preferred method to use for setting the time:

- **Synchronize with computer time:** sets the time from the clock on your computer.
- **Synchronize with NTP Server:** the camera will obtain the time from an NTP server every 60 minutes.
- **Set manually:** this option allows you to manually set the time and date.

Note: Note that if using a host name for the NTP server, a DNS server must be configured under TCP/IP settings.

4) Network

The screenshot shows a web-based configuration interface for a device's network settings. On the left is a navigation menu with categories like Basic Configuration, Video & Image, Event, System, Information, Security, Date & Time, Network (Basic, DDNS, RTP, UPnP, QoS, NAT Traversal, Zeroconf, Bonjour), Language, Maintenance, Support, and About. The main content area is titled 'Network - Basic' and contains several sections: IP Address Configuration (with DHCP and static IP options), IPv6 Address Configuration (with an enable checkbox and address field), DNS Configuration (with DHCP and static DNS server options), Host Name Configuration (with a text field), Services (with input fields for HTTP, HTTPS, and RTSP ports), and ARP/Ping setting (with an enable checkbox). At the bottom right are 'Save' and 'Reset' buttons.

System

- Basic Configuration
- Video & Image
- Event
- System**
 - Information
 - Security
 - Date & Time
 - Network**
 - Basic**
 - DDNS
 - RTP
 - UPnP
 - QoS
 - NAT Traversal
 - Zeroconf
 - Bonjour
 - Language
 - Maintenance
 - Support
- About

Network - Basic

IP Address Configuration

Obtain IP address via DHCP
 Use the following IP address :

- IP address: 192 . 168 . 30 . 36
- Subnet mask: 255 . 255 . 255 . 0
- Default router: 192 . 168 . 30 . 1

IPv6 Address Configuration

Enable IPv6
IPv6 address : fe80::207:d8ff:fe10:1a15/64

DNS Configuration

Obtain DNS server via DHCP
 Use the following DNS server address :

- Domain name:
- Primary DNS server: 168 . 126 . 63 . 1
- Secondary DNS server: 0 . 0 . 0 . 0

Host Name Configuration

Host Name: HDG-T322NSRA80007D8101A

Services

HTTP port: 80
HTTPS port: 443
RTSP port: 554

ARP/Ping setting

Enable ARP/Ping setting

Save Reset

Setting in regard to network can be executed. Settings for IP, DNS, Host Name, Port, and ARP/Ping can be established, along with setting for DDNS, uPnP, QoS, Zeroconf, and Bonjour.

▼ Basic

- **IP Address Configuration:**
 - **Obtain IP address via DHCP:** Dynamic Host Configuration Protocol (DHCP) is a protocol that lets network administrators centrally manage and automate the assignment of IP addresses on a network. DHCP is enabled by default. Although a DHCP server is mostly used to set an IP address dynamically, it is also possible to use it to set a static, known IP address for a particular MAC address.
 - **Use the following IP address:** To use a static IP address for the VK2-1080VFD, check the button and then make the following settings:
 - * **IP address:** Specify a unique IP address for your VK2-1080VFD.
 - * **Subnet mask:** Specify the mask for the subnet the VK2-1080VFD is located on.
 - * **Default router:** Specify the IP address of the default router (gateway) used for connecting devices attached to different networks and network segments.
- **IPv6 Address Configuration**

Check this box to enable IPv6. Other settings for IPv6 are configured in the network router.
- **DNS Configuration**

DNS (Domain Name Service) provides the translation of host names to IP addresses on your network.

 - **Obtain DNS Server via DHCP:** Automatically use the DNS server settings provided by the DHCP server. Click the View button to see the current settings.
 - Use the following DNS server address to enter the desired DNS server by specifying the following:
 - * **Domain name:** enter the domain(s) to search for the host name used by the Network Camera. Multiple domains can be separated by semicolons (;). The host name is always the first part of a Fully Qualified Domain Name, for example, myserver is the host name in the Fully Qualified Domain Name [myserver.mycompany.com](#) where mycompany.com is the Domain name.
 - * **DNS servers:** enter the IP addresses of the primary and secondary DNS servers.
- **Host Name Configuration**
 - **Host Name** – enter the host name to be used as device information in the client software or SmartManager.
- **Services**
 - **HTTP port:** Enter a port to receive a service through the HTTP. Default Port Number is '80'.
 - **HTTPS port:** Enter a port to receive a service through the HTTPS. Default Port Number is '443'.
 - **RTSP port:** Enter a port to receive a service through the RTSP. Default Port Number is '554'.
- **ARP/Ping Setting**
 - Enable ARP/Ping setting of IP address - The IP address can be set using the ARP/Ping method, which associates the unit's MAC address with an IP address. Check this box to enable the service.
Leave disabled to prevent unintentional resetting of the IP address.

▼ DDNS

System

Basic Configuration

Video & Image

Event

System

Information

Security

Date & Time

Network

Basic

DDNS

RTP

UPnP

QoS

NAT Traversal

Zeroconf

Bonjour

Language

Maintenance

Support

About

Network - DDNS

Internet DDNS (Dynamic Domain Name Service)

Enable DDNS

*** Note**
Please remember you have to configure at least primary DNS server in DNS configuration settings to use Dynamic DNS.

- DDNS Server: cctv-network.co.kr

- Registered host:

- User name:

- Password:

- Confirm password:

- Maximum time interval: 1 hour

Register local network IP address

Registered IP address :

Save Reset

- **Internet DDNS (Dynamic Domain Name Service)**

When using the high-speed Internet with the telephone or cable network, users can operate the VK2-1080VFD on a floating IP environment in which IPs are changed at every access. Users can set up an account and password by visiting a DDNS service like <http://www.dyndns.com/>

- **Enable DDNS:** Check to get DDNS service to be available.
 - * **DDNS Server:** Select the DDNS server.
 - * **Registered host:** Enter an address of the DDNS server.
 - * **Username:** Enter an ID to access to the DDNS server.
 - * **Password:** Enter a password to be used for accessing the DDNS server.
 - * **Confirm:** Enter a password again to confirm it.
 - * **Maximum time interval:** Set a time interval to synchronize with the DDNS server. Select an item in the interval drop-down list.
 - * **Register local network IP address:** Register a Network Video Server IP address to the DDNS server

▼ RTP

The screenshot shows a web interface for configuring RTP settings. On the left is a navigation menu with categories: Basic Configuration, Video & Image, Event, System (selected), Security, Date & Time, Network (expanded), and About. Under Network, sub-items include Basic, DDNS, RTP (selected), UPnP, QoS, NAT Traversal, Zeroconf, Bonjour, Language, Maintenance, and Support. The main content area is titled 'Network - RTP' and contains two sections: 'Port Range' and 'Multicast'. The 'Port Range' section has 'Start port' set to 30000 and 'End port' set to 30059. The 'Multicast' section has 'Enable multicast' unchecked, 'Multicast destination IP' set to 231.1.128.20, 'RTP port' set to 40000, and 'RTP TTL' set to 1. 'Save' and 'Reset' buttons are at the bottom.

Real-time Transfer Protocol used for sending and receiving an audio or video on a real-time basis. These settings are the IP address, port number, and Time-To-Live value to use for the media stream(s) in multicast H.264 format. Only certain IP addresses and port numbers should be used for multicast streams. For more information, please see the online help.

- **Port Range**


- **Start port:** Enter a value between 1024 and 65532

- **Multicast**

This function is for sending Video and Audio to Multicast groups.

- **Enable Multicast:** Check the box to enable multicast operation.
- **Multicast destination IP:** Enter an IP between 224.0.0.0 and 239.255.255.255. Although it is empty, an IP will be entered automatically.
- **RTP port:** Enter a value between 1024 and 65532.
- **RTP TTL:** Enter a value between 1 and 255. If a network status is good, enter a lower value. On the other hand, if a network status is poor, enter a higher value. When there are many VK2-1080VFDs or users, a higher value may cause a heavy load to the network. For a detailed setting, please consult with a network manager.

▼ UPnP

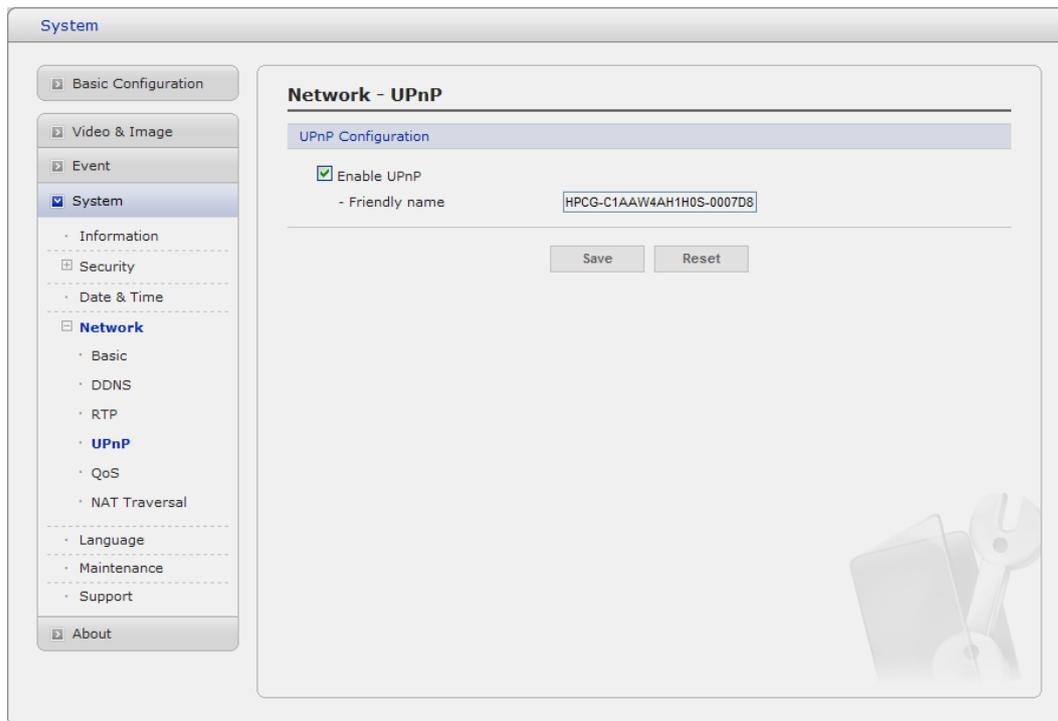

The VK2-1080VFD includes support for UPnP™ Universal Plug and Play. It is enabled by default, and the VK2-1080VFD then is automatically detected by operating systems and clients that support this protocol.


Note: UPnP™ must be installed on your workstation if running Windows XP. To do this, open the Control Panel from the Start Menu and select Add/Remove Programs. Select Add/Remove Windows Components and open the Networking Services section. Click Details and then select UPnP™ as the service to add.

▼ QoS

Quality of Service (QoS) provides the means to guarantee a certain level of a specified resource to selected traffic on a network. Quality can be defined as a maintained level of bandwidth, low latency, and no packet losses.

The main benefits of a QoS-aware network are:

- The ability to prioritize traffic and thus allow critical flows to be served before flows with lesser priority.
- Greater reliability in the network, thanks to the control of the amount of bandwidth an application may use, and thus control over bandwidth races between applications.

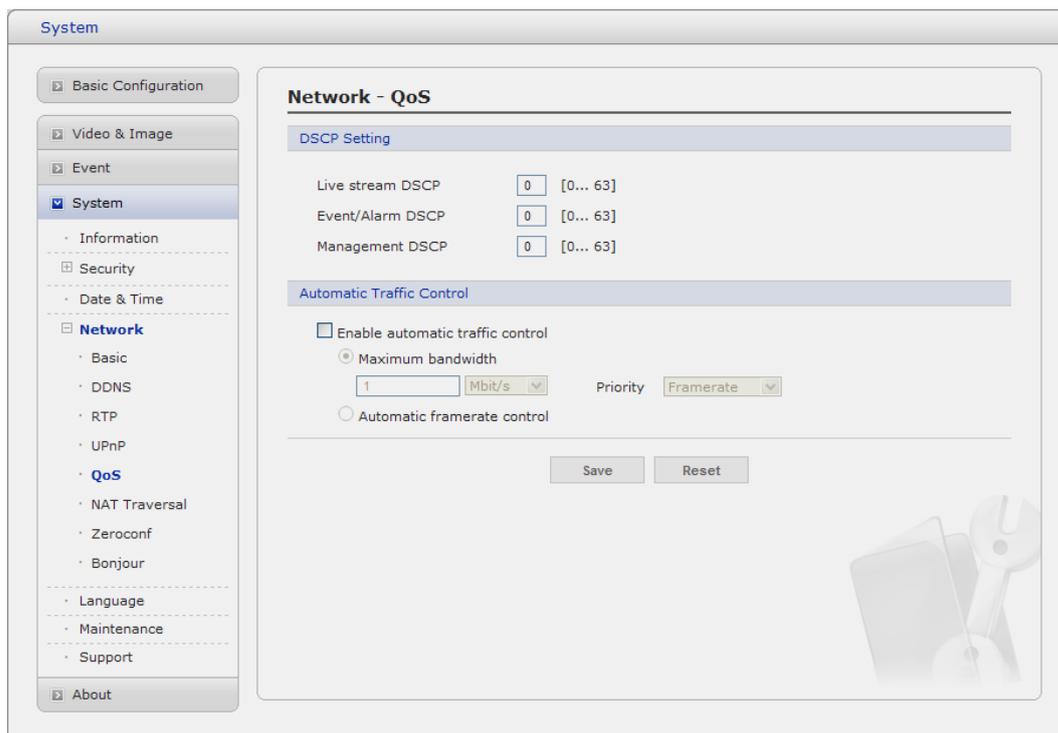

• DSCP Settings

For each type of network traffic supported by your network video product, enter a DSCP (Differentiated Services Code Point) value. This value is used to mark the traffic's IP header. When the marked traffic reaches a network router or switch, the DSCP value in the IP header tell the router or switch which type of treatment to apply to this type of traffic, for example, how much bandwidth to reserve for it. Note that DSCP values can be entered in decimal or hex form, but saved values are always shown in decimal.

The following types of traffic are marked:

- **Live Stream DSCP:**
- **Event/Alarm DSCP:**
- **Management DSCP:**

- **Auto Traffic Control**


Set a limitation on user network resources by designating the maximum bandwidth.

- Maximum bandwidth - In case of sharing other network programs or equipment, it is possible to set a limitation on the maximum bandwidth in the unit of Mbit/s or kbit/s.
- Auto frame rate - Selected if not influenced by a network-related program or equipment without a limitation on the network bandwidth.

▼ **NAT Traversal**


A broadband router allows devices on a private network (LAN) to share a single connection to the Internet. This is done by forwarding network traffic from the private network to the “outside”, that is, the Internet. Security on the private network (LAN) is increased since most broadband routers are pre-configured to stop attempts to access the private network (LAN) from the public network/Internet.

Use **NAT traversal** when your VK2-1080VFDs are located on an intranet (LAN) and you wish to make it available from the other (WAN) side of a NAT router. With NAT traversal properly configured, all HTTP traffic to an external HTTP port in the NAT router is forwarded to the VK2-1080VFD.

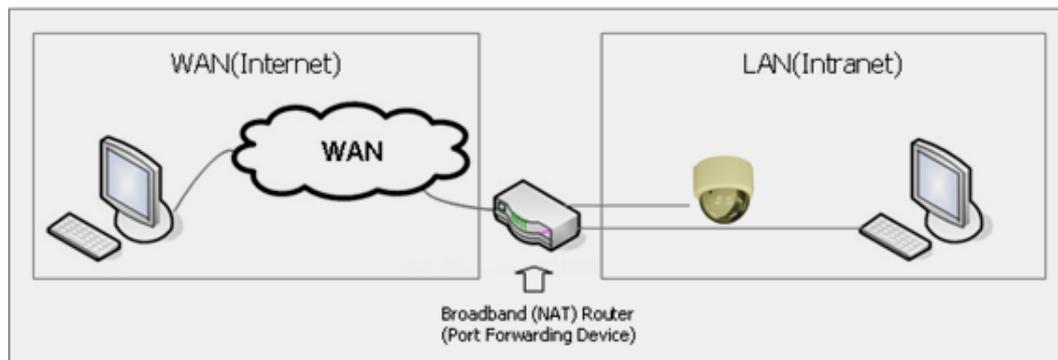

Notes:

- For NAT traversal to work, this must be supported by the broadband router.
- The broadband router has many different names: “NAT router”, “Network router“, Internet Gateway”, “Broadband sharing device” or “Home firewall” but the essential purpose of the device is the same.

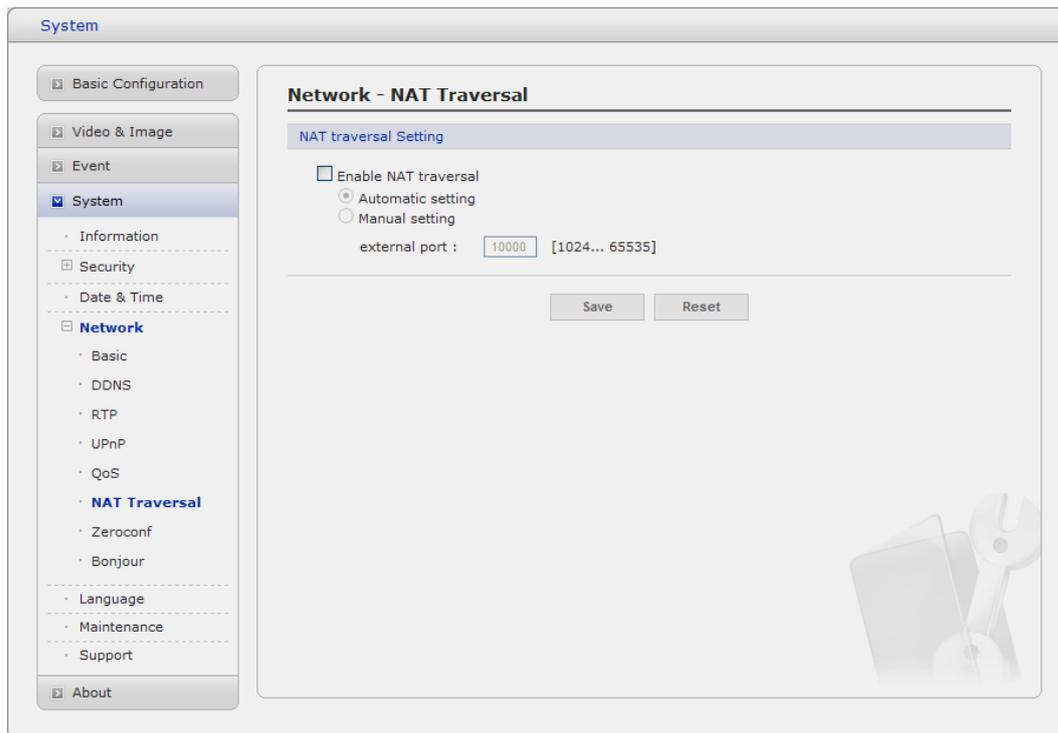

- **NAT traversal Settings**


- **Enable** - when enabled, the network transmitters attempt to configure port mapping in a NAT router on your network, using UPnP™. Note that UPnP™ must be enabled in the VK2-1080VFD (see System>Network>UPnP).
- * **automatic setting:** The VK2-1080VFD automatically search for NAT routers on your network.
- * **manual setting:** Select this option to manually select a NAT router and enter the external port number for the router in the field provided.

Notes:

- If you attempt to manually enter a port that is already in use, an alert message will be displayed.
- When the port is selected automatically it is displayed in this field. To change this enter a new port number and click Save.

▼ Zeroconf

Zeroconf allows the VK2-1080VFD to create and assign IP address for VK2-1080VFD s and connect to a network automatically.

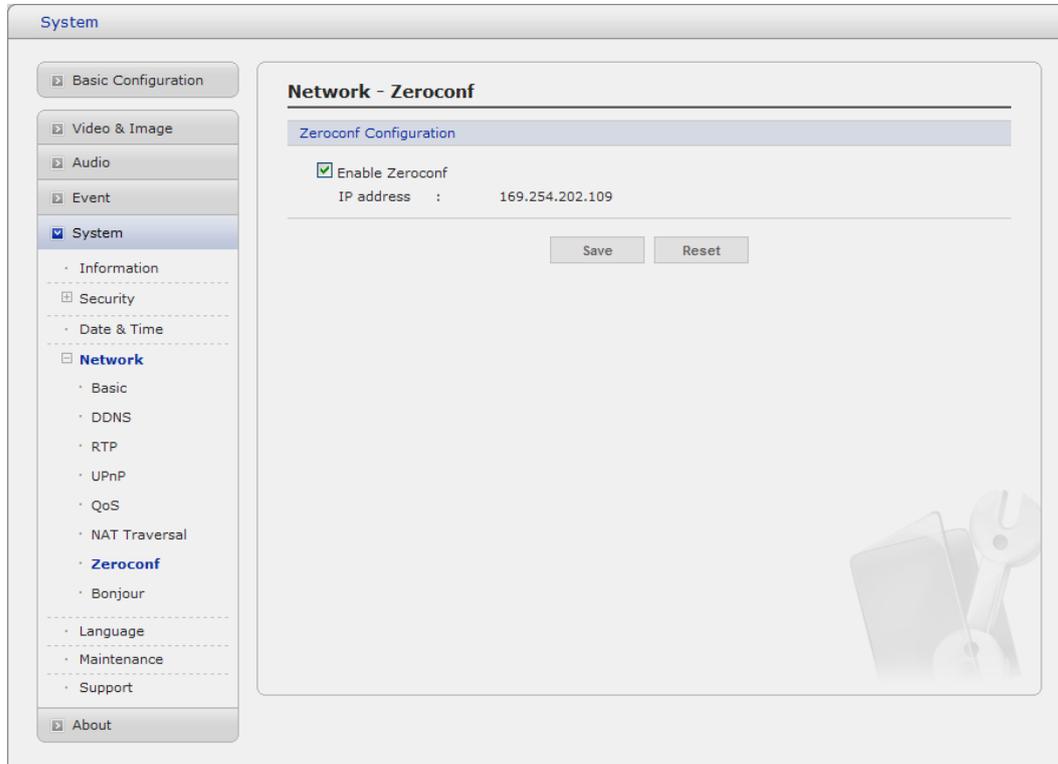

Zero configuration networking (zeroconf), is a set of techniques that automatically creates a usable Internet Protocol (IP) network without manual operator intervention or special configuration servers.


Zero configuration networking allows devices such as computers and printers to connect to a network automatically. Without zeroconf, a network administrator must set up services, such as Dynamic Host Configuration Protocol (DHCP) and Domain Name System (DNS), or configure each computer's network settings manually, which may be difficult and time-consuming.

Zeroconf is built on three core technologies:

- Assignment of numeric network addresses for networked devices (link-local address auto configuration)
- Automatic resolution and distribution of computer hostnames (multicast DNS)
- Automatic location of network services, such as printing devices through DNS service discovery.

▼ Bonjour

The VK2-1080VFD includes support for Bonjour. When enabled, the VK2-1080VFD is automatically detected by operating systems and clients that support this protocol.

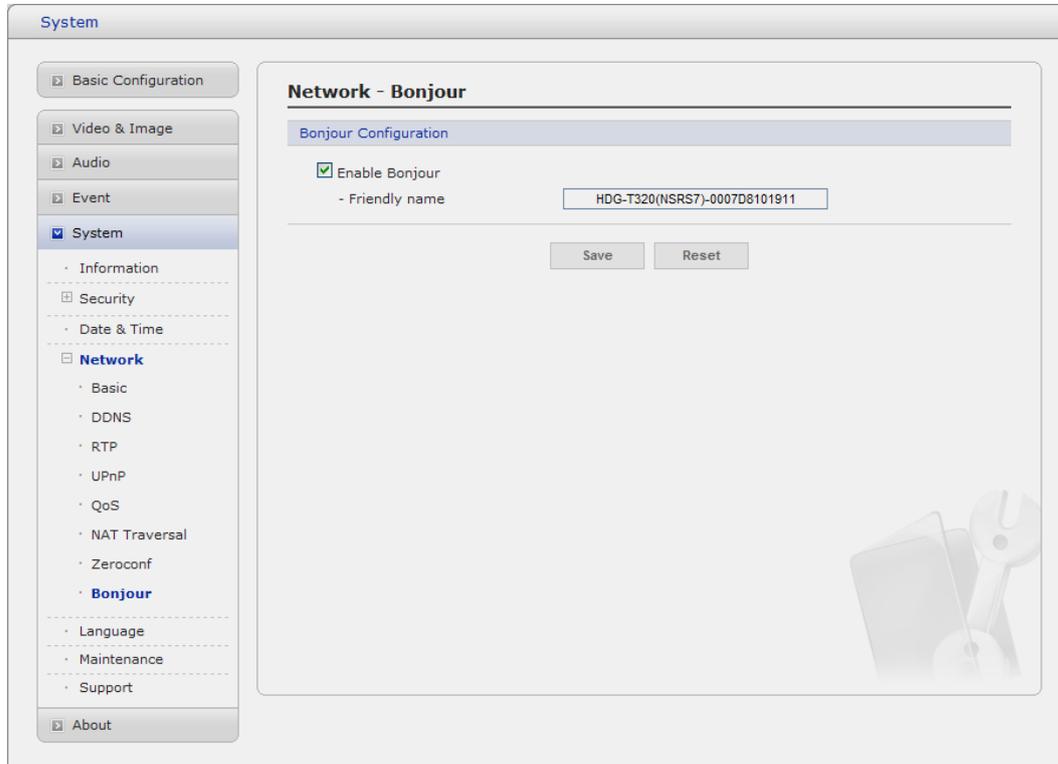


Note: Bonjour - Also known as zero-configuration networking, Bonjour enables devices to automatically discover each other on a network, without having to enter IP addresses or configure DNS servers. Bonjour is a trademark of Apple Computer, Inc.

5) Language

The OSD language options available are: English, French, German, Spanish and Italian.

6) Maintenance

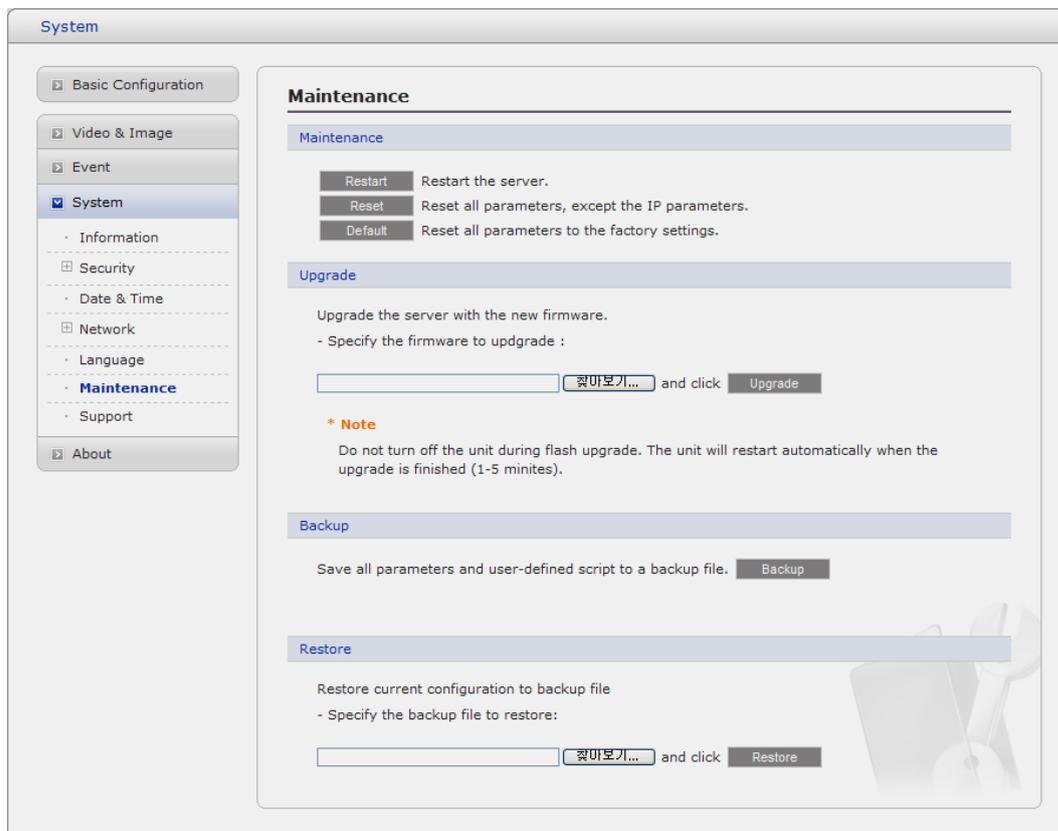

- **Maintenance Server**

- **Restart:** The unit is restarted without changing any of the settings. Use this method if the unit is not behaving as expected.
- **Restore:** The unit is restarted and most current settings are reset to factory default values. The settings that are not affected are:
 - * the boot protocol (DHCP or static)
 - * the static IP address
 - * the default router
 - * the subnet mask
 - * the system time
- **Default:** The default button should be used with caution. Pressing this will return all of the VK2-1080VFD's settings to the factory default values (including the IP address).

- **Update Server**

Carry out the upgrade by importing an upgrade file and pressing the Upgrade button. During the upgrade, do not turn off the power of the VK2-1080VFD. Wait for 2 minutes after an upgrade is completed to allow the camera to reboot completely

- **Backup**

Save the camera's settings to a PC.


- **Restore**

Import and apply a set file from a PC.

Note: Backup and Restore can only be used on the same unit running the same firmware. This feature is not intended for multi-configurations or for firmware upgrades.

7) Support

The support page provides valuable information on troubleshooting, should you require technical assistance.

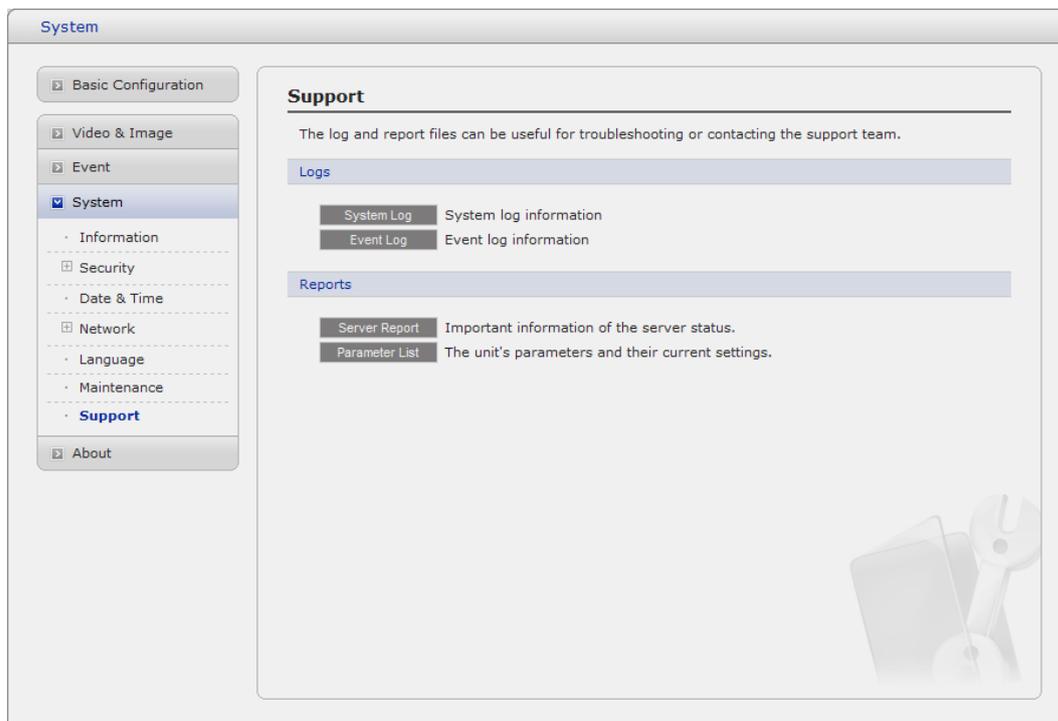


- **Logs**
The VK2-1080VFD support system log information. Click the System Log button to get the log data.
- **Reports**
 - **Server Report:** Click the Server Report button to get the important information about the server's status and should always be included when requesting support.
 - **Parameter List:** Click the Parameter List button to see the unit's parameters and their current settings.

3.6.5 About

The following website will provide the support information for the VK2-1080VFD information and operation. www.vista-cctv.com/graphica

3.8 Playback for Micro SD card

Select the Play back Icon from the main menu page, if a Micro SD card is installed and configured, the following page will be displayed.

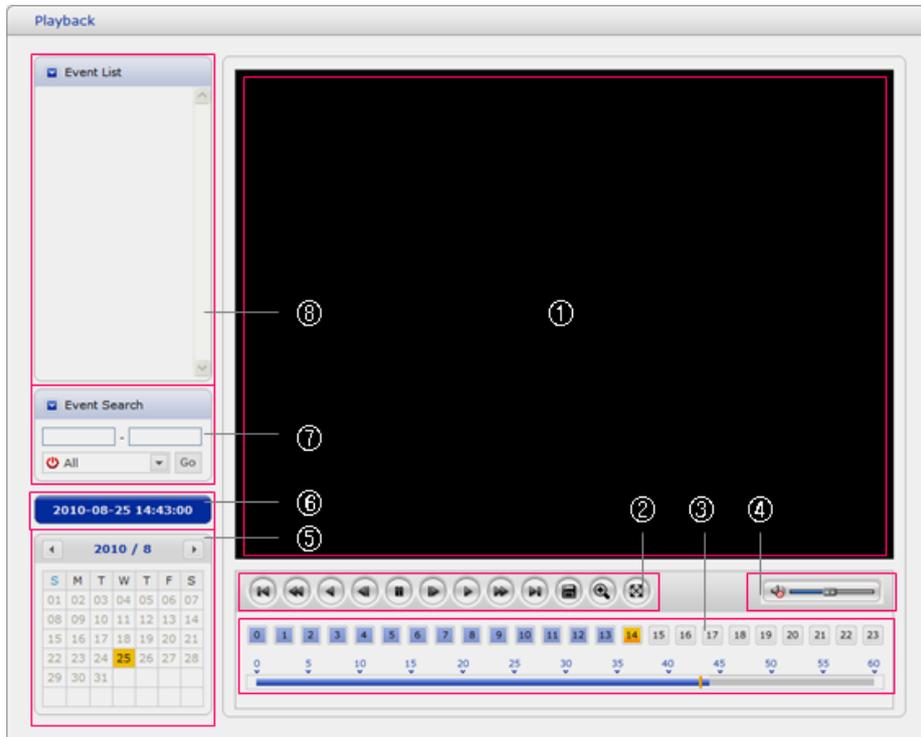

(1) Video Screen

You can see the video screen when playing the video clip in the Micro SD memory

(2) Playback Buttons

To view a recorded data from the Micro SD local storage, select it from the list and click the Playback buttons.

-  Go to the first: go to the beginning of the video clip.
-  Fast backward play:
-  Backward play: play backward of the video clip.
-  Step backward play: go back one frame of the video clip.
-  Pause: pause playback of the video clip.
-  Step forward play: go forward one frame of the video clip.
-  Forward Play: play forward the video clip.
-  Fast forward play: play fast forward of the video clip.
-  Step forward play: go forward one frame of the video clip.
-  Clip copy: copy the video clip.
-  Zoom In: zoom in the video clip
-  Full Screen: display full screen of the video.

(3) Time Chart

Display an hour-based search screen for the chosen date. If there is recorded data, a blue section will be displayed on a 24-hour basis.

(4) Speaker Control Bar

Use this scale to control the volume of the speakers.

(5) Search Calendar


Search results from the Micro SD card in the VK2-1080VFD connected are displayed monthly. If there is recorded data for a particular date, a blue square on the date will be displayed.

(6) Play Time

Displays time of the video playing.

(7) Event Search Window

Select a search option in the drop-down list and click GO button. You can also enter the time period for searching. If you click Start Date or End Date zone, displays Search Calendar.




(8) Event List Window

Event List displays the event(s) that were recorded on the Micro SD card. Select a list and click the play button. The video clip will be played.

3.9 Help

The Help information window is a popup window, so that users can open and read it without a need for log-in.

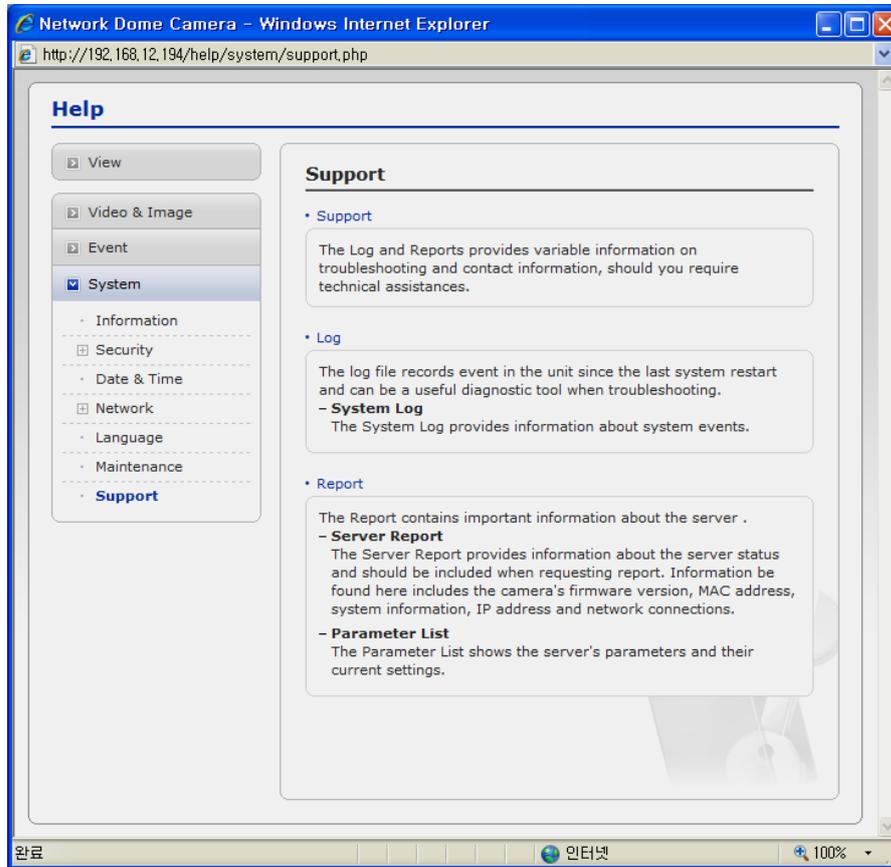

3.10 Resetting to the factory default settings

To reset the VK2-1080VFD to the original factory settings, go to the Setup>System> Maintenance web page (described in "3.6.6 System > Maintenance") or use the control button on the VK2-1080VFD, as described below:

- **Using the Reset Button**

Follow the instructions below to reset the VK2-1080VFD to the factory default settings using the Reset Button.

1. Switch off the VK2-1080VFD by disconnecting the power adapter.
2. Open the lens cover.
3. Press and hold the Control Button (SW1) on the board with your finger while reconnecting the power.
4. Keep the Control button (SW1) pressed during about 2 seconds.
5. Release the Control Button (SW1).
6. The VK2-1080VFD resets to factory defaults and restarts after completing the factory reset.
7. Close the lens cover.

CAUTION: When performing a Factory Reset, you will lose any settings you have saved.

4. Appendix


4.1 Troubleshooting

If problems occur, verify the installation of the VK2-1080VFD with the instructions in this manual and with other operating equipment. Isolate the problem to the specific piece of equipment in the system and refer to the equipment manual for further information.

Problems/Symptoms	Possible Causes or Corrective Actions
The camera cannot be accessed by some clients.	If using a proxy server, try disabling the proxy setting in your browser. Check all cabling and connectors.
The camera works locally, but not externally.	Check if there are firewall settings that need to be adjusted. Check if there are router settings that need to be configured.
Poor or intermittent network connection.	If using a network switch, check that the port on that device uses the same setting for the network connection type (speed/duplex).
The camera cannot be accessed via a host name.	Check that the host name and DNS server settings are correct.
Not possible to log in.	When HTTPS is enabled, ensure that the correct protocol (HTTP or HTTPS) is used. When attempting to log in, you may need to manually type in http or https in the browser's address bar.
No image using Refresh and/or slow updating of images.	If images are very complex, try limiting the number of clients accessing the camera.
Images only shown in black & white.	Check the Video & Image setting.
Blurred images.	Refocus the camera.
Poor image quality.	Increased lighting can often improve image quality. Check that there is sufficient lighting at the monitored location. Check all image and lighting settings.
Rolling dark bands or flickering in image.	Try adjusting the Exposure Control setting under AE and AWB part.
H.264 not displayed in the client.	Check that the correct network interface is selected in the Video & Image/Stream.
Multicast H.264 not displayed in the client.	Check with your network administrator that the multicast addresses used by the camera are valid for your network. Check that the Enable multicast checkbox are enabled in the System/Network/RTP tab. Checks with your network administrator to see if there is a firewall preventing viewing.
Multicast H.264 only accessible by local clients.	Check if your router supports multicasting, or if the router settings between the client and the server need to be configured. The TTL value may need to be increased.
Colour saturation is different in H.264 and Motion JPEG.	Modify the settings for your graphics adapter. Please see the adapter's documentation for more information.
Video cannot be recorded.	Check that the SD Card is inserted properly. Check that the SD Card is formatted properly.

4.2 Alarm Connection

The following connection diagram gives an example of how to connect a VK2-1080VFD.

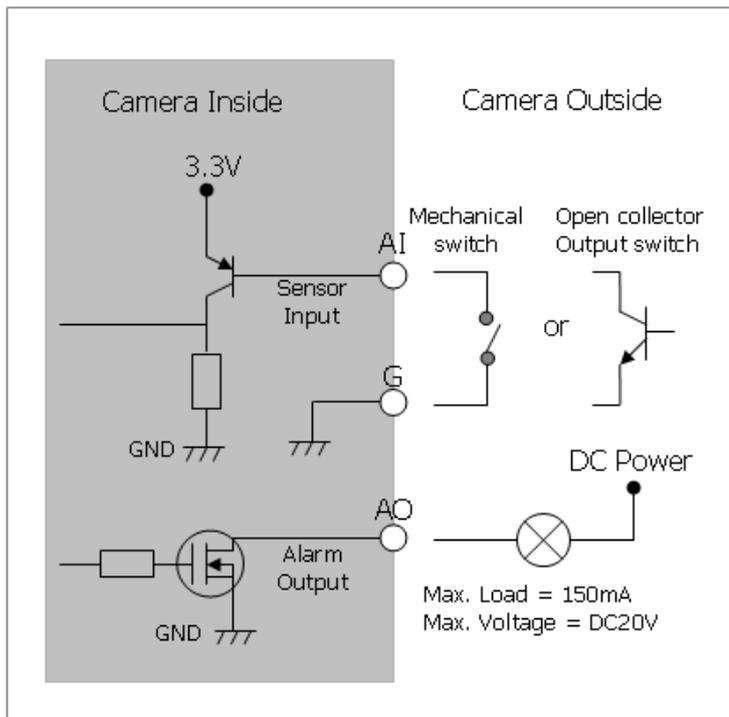

4.3 Preventive Maintenance

Preventive maintenance allows detection and correction of minor that faults before they become serious and cause equipment failure.

Every three-month, perform the following maintenance.

1. Inspect all connection cables for deterioration or other damage.
2. Clean components with a clean damp cloth.
3. Verify that all the mounting hardware is secure.

