




DUNASFERN

Belden Equivalent 8723 PE

Physical Characteristics

Inner Conductor:	Stranded Tinned Copper
Conductor Diameter:	0.25x7 (22AWG)
Insulation:	SPE, Colour: White Green Red Black
Shield:	Blue Aluminium Foil
Drain:	Stranded Tinned Copper, 0.20x7
Outer Jacket:	SPE Black
NOM OD:	5.90mm

Design

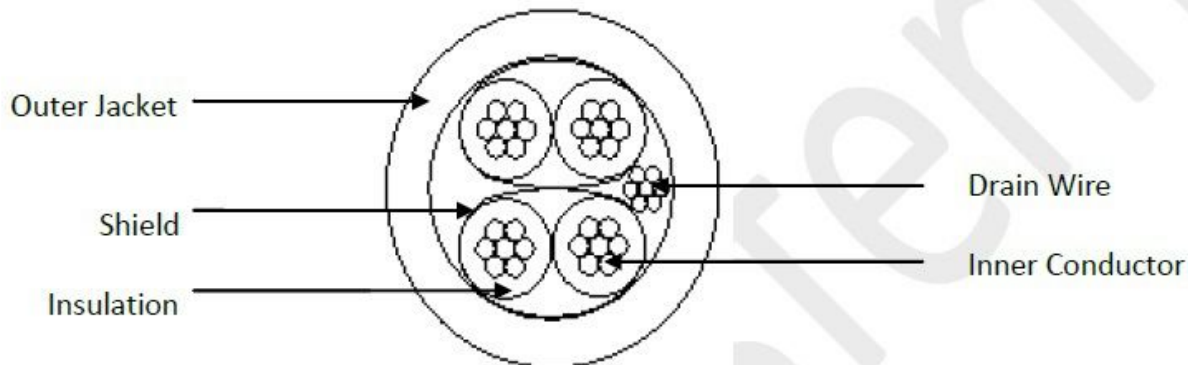

Electrical Characteristics

Max. Conductor DC Resistance at 20°C ($\Omega/100$) :	6.53
Min. Insulation DC Resistance at 20°C ($M\Omega \cdot M$):	200
Rated Temperature(°C) :	-20 ~ +80
Rated Voltage (V):	300v

Unit 1 Madingley Court, Chippenham Drive, Kingston, Milton Keynes, MK10 0BZ

Tel - 01908 282200

Fax - 01908 282205

Email - enquiries@dunasfern.com