

# AXIS W400 Body Worn Activation Kit

## Automatic activation of body worn cameras

AXIS W400 Body Worn Activation Kit automatically activates recording by all body worn cameras in the same system when a lightbar or siren is activated, or a panic button is pressed. This helps keep police departments in compliance with regulations, for example. It also ensures that there is always footage of escalated events.

- > [Automatic recording activation](#)
- > [Triggered by I/O](#)
- > [Uses Bluetooth<sup>®</sup> beacons](#)



# AXIS W400 Body Worn Activation Kit

## General

<b>Box content</b>	AXIS D3110 Connectivity Hub, LM842 WiFi 802.11ac / Bluetooth® 5.0 USB Combi Adapter, LM256 RP SMA Dual Band 2.4GHz and 5.8GHz Antenna, AXIS TD3901 Strain Relief For full specifications, see the AXIS D3110 datasheet at <a href="https://axis.com/products/axis-d3110-connectivity-hub">axis.com/products/axis-d3110-connectivity-hub</a>
<b>Operating conditions</b>	-20 °C to 65 °C (-4 °F to 149 °F)
<b>Storage conditions</b>	-40 °C to 65 °C (-40 °F to 149 °F) Humidity 5–90% RH (non-condensing)
<b>Dimensions</b>	For the product dimensions, see the dimension drawings in this datasheet.
<b>Weight</b>	<b>AXIS D3110 Connectivity Hub:</b> 392 g (0.9 lb) <b>LM842 WiFi / Bluetooth® Adapter:</b> 6 g (0.01 lb) <b>LM256 Antenna:</b> 10 g (0.02 lb) <b>AXIS TD3901 Strain Relief:</b> 35 g (0.08 lb)

## Approvals

### AXIS D3110 Connectivity Hub:

**EMC**  
CISPR 35, EN 50121-4, EN 50130-4, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2, FCC Part 15 Subpart B Class A, IEC 62236-4, KC KN32 Class A, KC KN35, RCM AS/NZS CISPR 32 Class A, VCCI Class A

**Safety**  
CAN/CSA C22.2 No. 62368-1, IEC/EN/UL 62368-1, UL 2043, UN ECE R118

**Environment**  
IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-64, IEC TR 60721-4-5 Class 5M3, IEC/EN 61373 Category 1 Class B, NEMA TS 2 (2.2.7-2.2.9)

**Network**  
NIST SP500-267

### Optional accessories

AXIS Surveillance Cards  
For more accessories, go to [axis.com/products/axis-w400-body-worn-activation-kit#accessories](https://axis.com/products/axis-w400-body-worn-activation-kit#accessories)


### Warranty

3-year warranty, see [axis.com/warranty](https://axis.com/warranty)

### Part numbers

Available at [axis.com/products/axis-w400-body-worn-activation-kit#part-numbers](https://axis.com/products/axis-w400-body-worn-activation-kit#part-numbers)

# Dimension drawings

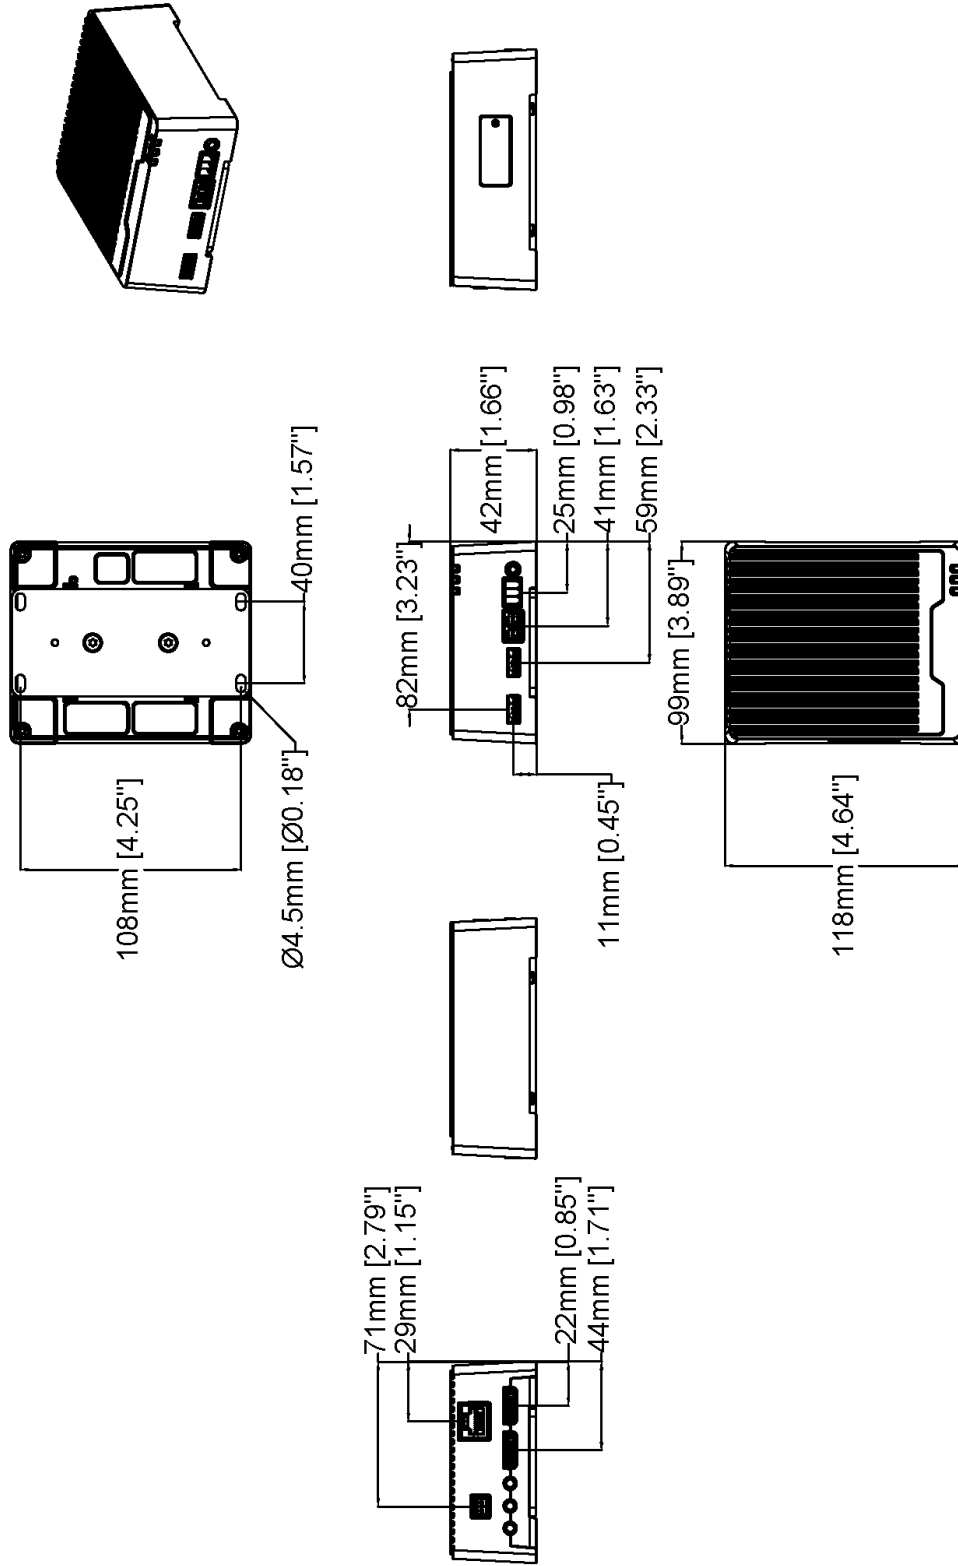



## AXIS D3110 Connectivity Hub

Revision	v.01	Revision date	2021-05-31
Paper size	A4	Release date	2021-05-31
Created by	JSK	Scale	1:3




© 2021 Axis Communications

www.axis.com


12mm [0.47"]



9mm [0.37"]




5mm [0.20"]



Ø6mm [Ø0.25"]

12mm [0.45"]

20mm [0.80"]

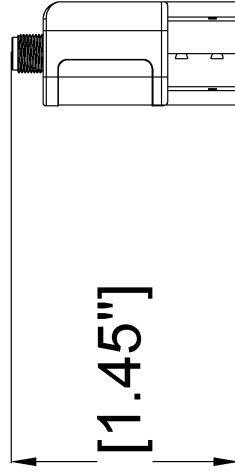

37mm [1.45"]

17mm [0.66"]








www.axis.com

LM842 WiFi 802.11ac / Bluetooth® 5.0 USB Combi Adapter

Revision	v.01	Revision date	2023-10-19
Paper size	A4	Release date	2023-10-19
Created by	MIF	Scale	1:1

© 2023 Axis Communications

Adjustable 360° Swivel  
with 3 tilt options.

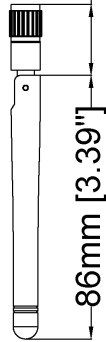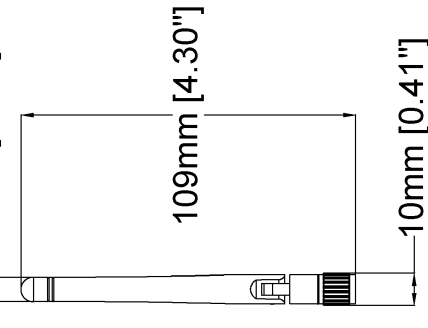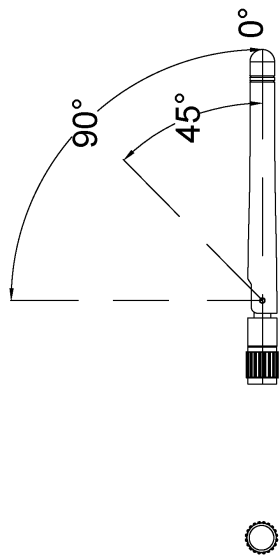

www.axis.com

### LM256 RP SMA Dual Band 2.4GHz and 5.8GHz Antenna

Revision	v.01	Revision date	2023-10-13
Paper size	A4	Release date	2023-10-13
Created by	MF	Scale	1:2

© 2023 Axis Communications