

# QNE-8011R

5M H.265 IR Flateye Camera

Network



FC |  | CE | EAC

## Key Features

- Max. 5Megapixel (2592 x 1944) resolution
- 2.8mm fixed lens
- 0.15Lux (Color), 0Lux (B/W, IR LED on)
- Max. 30fps@5MP (H.265 / H.264)
- H.265, H.264, MJPEG codec support, Multiple streaming
- Day & Night, WDR (120dB)
- Tampering, Motion detection, Defocus detection, Virtual line
- Micro SD / SDHC / SDXC memory slot (Max. 128GB)
- Hallway view, WiseStream II support
- IR Viewable length 20m
- LDC, PoE

## Compatible Accessories (Optional)



SBV-125BW



SBP-125WMW

<b>Video</b>	
Imaging Device	1/2.8" 5MP CMOS
Resolution	5MP mode : 2592x1944, 1920x1080, 1280x960, 1280x720, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240 4MP mode : 2560x1440, 1920x1080, 1280x960, 1280x720, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 15fps/12fps(60Hz/50Hz)
Min. Illumination	Color: 0.15Lux(F2.0, 1/30sec) BW: 0Lux(IR LED on)
<b>Lens</b>	
Focal Length (Zoom Ratio)	2.8mm fixed focal
Max. Aperture Ratio	F2.0
Angular Field of View	H: 104.4°/V: 76.7°/D: 136.1°
Focus Control	Fixed
<b>Pan / Tilt / Rotate</b>	
Pan / Tilt / Rotate Range	0°~350° / 0°~75° / 0°~360°
<b>Operational</b>	
Camera Title	Displayed up to 85 characters
Day & Night	Auto(Electrical)
Backlight Compensation	BLC, WDR, SDR
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNR
Motion Detection	4ea, polygonal zones
Privacy Masking	6ea, rectangular zones
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	Support
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (1/5~1/12,000sec)
Video Rotation	Flip, Mirror, Hallway view(90°/270°)
Analytics	Defocus detection, Directional detection, Motion detection, Enter/Exit, Tampering, Virtual line
Alarm Triggers	Analytics, Network disconnect
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers
IR Viewable Length	20m(65.62ft)
<b>Network</b>	
Ethernet	RJ-45(10/100BASE-T)
Video Compression	H.265/H.264: Main/High, MJPEG
Smart Codec	WiseStream II

<b>Bitrate Control</b>	H.264/H.265: CBR or VBR MJPEG: VBR
<b>Streaming</b>	Unicast(6 users) / Multicast Multiple streaming(Up to 3 profiles)
<b>Protocol</b>	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP
<b>Security</b>	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP)
<b>Application Programming Interface</b>	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform

### General

<b>Webpage Language</b>	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch
<b>Edge Storage</b>	Micro SD/SDHC/SDXC 1slot 128GB
<b>Memory</b>	512MB RAM, 256MB Flash

### Environmental & Electrical

<b>Operating Temperature / Humidity</b>	-30°C ~ +55°C(-22°F ~ +131°F) / Less than 90% RH * Start up should be done at above -20°C
<b>Storage Temperature / Humidity</b>	-30°C ~ +60°C(-22°F ~ +140°F) / Less than 90% RH
<b>Certification</b>	IP67, IK10
<b>Input Voltage</b>	PoE(IEEE802.3af, Class3)
<b>Power Consumption</b>	PoE: Max 7.40W, typical 5.50W

### Mechanical


<b>Color / Material</b>	White / Aluminum
<b>RAL Code</b>	RAL9003
<b>Product Dimensions / Weight</b>	Ø125.0x87.4mm(Ø4.92x3.44"), 645g(1.422 lb)

### DORI (EN62676-4 standard)


<b>Detect (25PPM/ 8PPF)</b>	40.2m(131.91ft)
<b>Observe (63PPM/ 19PPF)</b>	16.1m(52.76ft)
<b>Recognize (125PPM/ 38PPF)</b>	8.0m(26.38ft)
<b>Identify (250PPM/ 76PPF)</b>	4.0m(13.19ft)

- The latest product information / specification can be found at [hanwha-security.com](http://hanwha-security.com)
- Design and specifications are subject to change without notice.
- Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.


NO	PART NAME	CODE NO.	MATERIAL	Q'TY	REMARK
1	ASSY-TOTAL_QNE-8011R_V1	045631	Check note	1	-




[REAR VIEW]




[LEFT VIEW]




[TOP VIEW]



[RIGHT VIEW]



[BOTTOM VIEW]

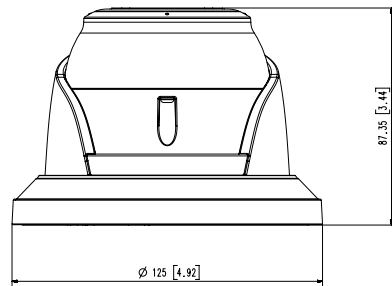

[FRONT VIEW]

• Dimension Unit : mm [Inch]

A1  
CHANGE

UNIT	DATE	DESIGN	CHECK	APPROVAL	PART NAME	APPEARANCE_QNE-8011R
SCALE	1/1	CHOI.E.S		CHOI.Y.S	MODEL NAME	QNE-8011R/QNE-8021R
		'19.04.08		'19.04.08	CODE NO.	QNE-8011R/QNE-8021R
Hanwha Techwin						